




SPECIFICATIONS

Current Rating: 4A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin-Plated
Material: Nylon 66,UL94V-2

ORDER INFORMATION

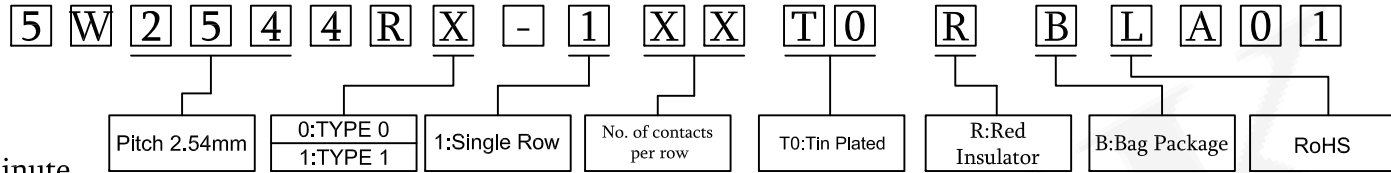

No. of contacts	Dimensions	
	A	B
02	2.54	5.08
03	5.08	7.62
04	7.62	10.16
05	10.16	12.70
06	12.70	15.24
07	15.24	17.78
08	17.78	20.32
09	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.20
19	45.72	48.26
20	48.26	50.80

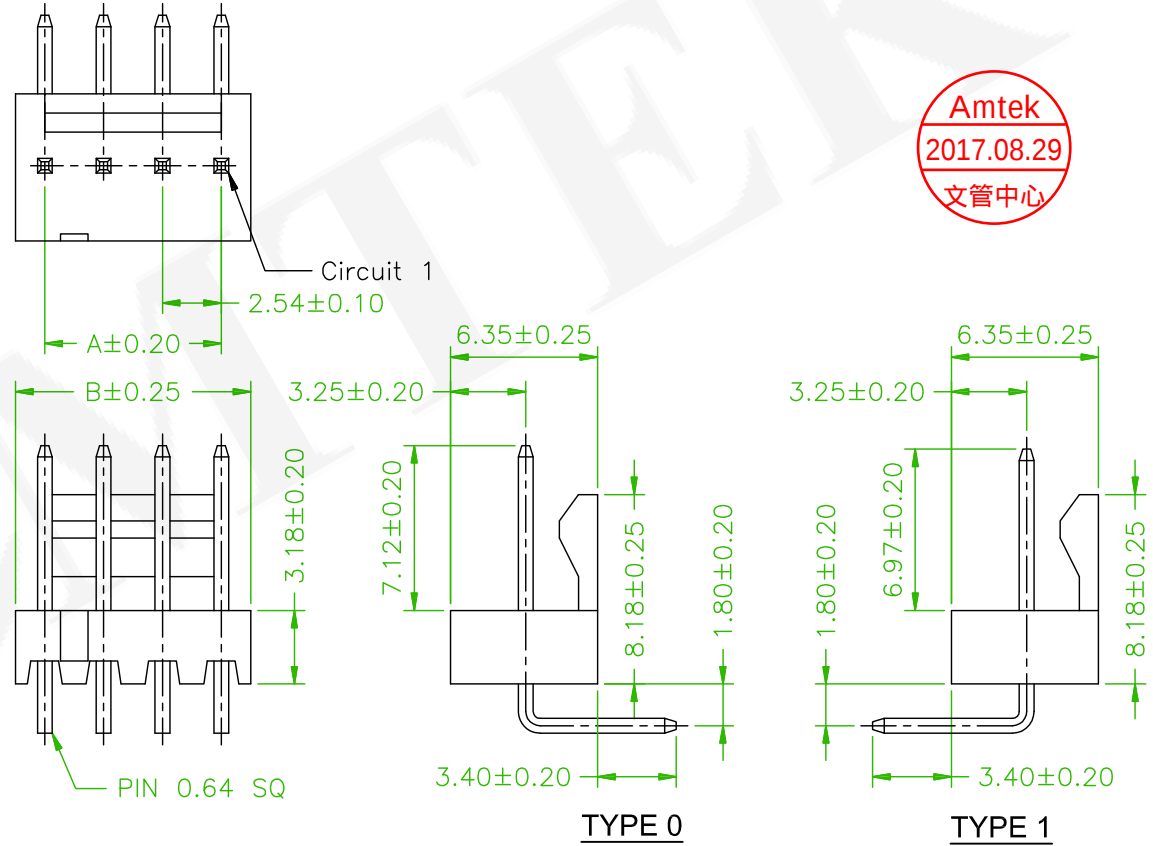

Old Part No.:2544R-XXTR-L & 2544RO-XXTR-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm WAFER RIGHT ANGLE				頁數 Page	1/1
	品號 PART NO.	5W2544RX-1XXT0RBLA01				繪圖 DRAWN	Jeff 2016/12/30
	圖號 DRAWING NO.	GW090-JF099		版本 REV.	A	核對 CHECKED	Johnny 2016/12/30
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/12/30
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15		單位 UNIT	mm	THIRD ANGLE PROJECTION	