

Specifications

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 20mΩ Max


Insulation Resistance: 1000MΩMin

Withstanding Voltage: 1500V AC/minute



Terminal: Brass/Gold Plated

Material: Nylon 6T,UL94V-0


ORDER INFORMATION

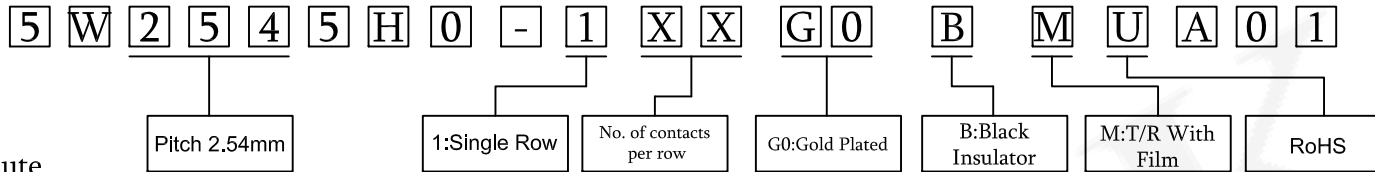


Circuit No.	Dimensions			
	A	B	C	D
02P	2.54	8.89	---	5.33
03P	5.08	11.43	8.12	7.87
04P	7.62	13.97	10.66	10.41
05P	10.16	16.51	13.20	12.95
06P	12.70	19.05	15.74	15.49
07P	15.24	21.59	18.28	18.03
08P	17.78	24.13	20.82	20.57
09P	20.32	26.67	23.36	23.11
10P	22.86	29.21	25.90	25.65
11P	25.40	31.75	28.44	28.19
12P	27.94	34.29	30.98	30.73








PIN 0.64 SQ.
Circuit T




(TOP VIEW)



KAPTON TAPE
(FOR PICK AND
PLACE SYSTEMS)

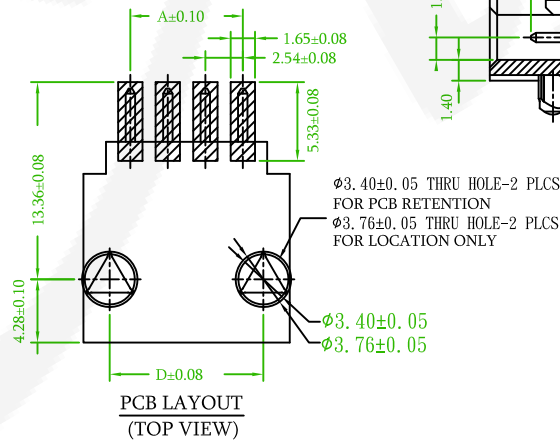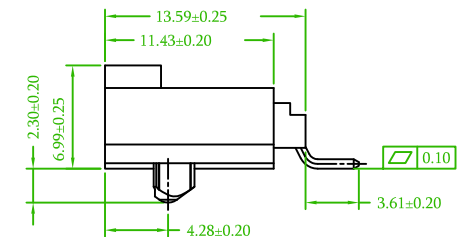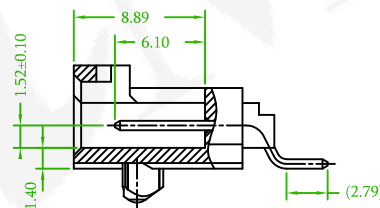

Old Part No.:2545MR-XXGB-U



品名 TITLE	2.54mm MINI LATCH WAFER SMT RIGHT ANGLE			頁數 Page	1/1
品號 PART NO.	5W2545H0-1XXG0BMUA01			繪圖 DRAWN	Jeff
圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Johnny
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron
公差 TOLERANCE	.X ± 0.30 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE