

SPECIFICATION

Current Rating: 2.5 AMP

Insulation Resistance: 1000MΩ Min.

Dielectric Voltage: 600V AC for one minute



Operation Temperature: -25°C to +85 °C

MATERIAL


Insulator: PBT, UL 94V-0

Contact Pin: Copper Alloy


ORDER INFORMATION

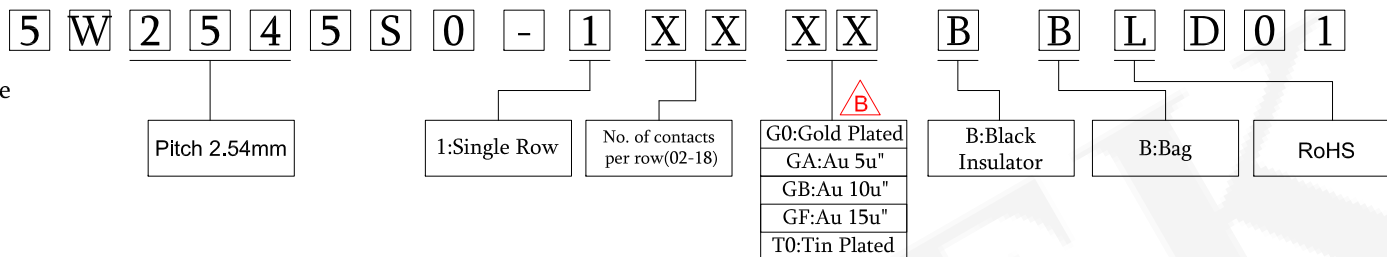

4-18 Pin



3 Pin




2 Pin



P.C.B. LAYOUT
TOLERANCE: ±0.1


2.54x(No. of Positions+1)±0.5

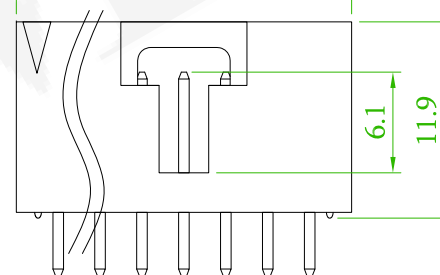

2.54

□0.64

2.54x(No. of Contacts-1)±0.3



Old Part No.:2545S-XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Bx1	Add plated: GA, GB, GF.	Gary	2017/09/15

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm Mini Latch WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W2545S0-1XXXXBBLD01				繪圖 DRAWN	Jeff 2016/08/18
	圖號 DRAWING NO.	GW097-GA628	版本 REV.	B	核對 CHECKED	Boris 2016/08/18	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/18	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		