

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Terminal: Brass/Tin-plated
Material:P.B.T,UL94V-0

5 W 2 5 4 6 R 0 - 1 X X T 0 X B L A 0 1

Pitch 2.54mm

1:Single Row

No. of contacts per row

T0: Tin Plated


B:Black
R:Red

B:Bag



RoHS



PIN	Dimensions		
	A	B	C
02	2.54	7.62	6.22
04	7.62	12.70	11.30
05	10.16	15.24	13.84
06	12.70	17.78	16.38
08	17.78	22.86	21.46
10	22.86	27.94	26.54



Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

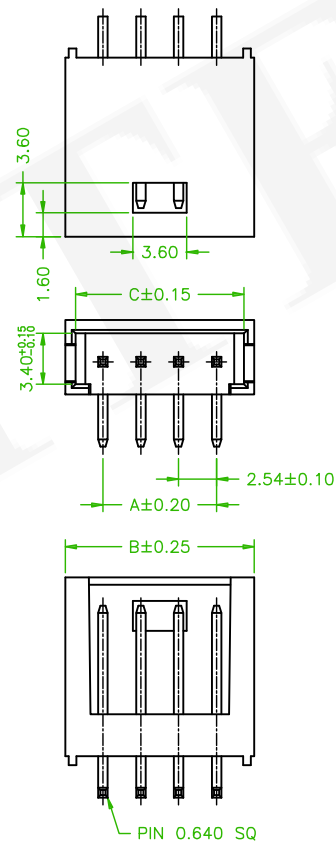

Old Part No.:2546R-1XTX-L

	Revise the drawing	B	2016/08/05 Roy
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.54mm WAFER RIGHT ANGLE				頁數 Page	1/1
品號 PART NO.	5W2546R0-1XXT0XBLA01			繪圖 DRAWN	Mia 2015/09/11	
圖號 DRAWING NO.		版本 REV.	B	核對 CHECKED	John 2015/09/11	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/09/11	
公差 TOLERANCE	.X ±0.25 .XX ±0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		