

SPECIFICATIONS

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 5000MΩ Min

Withstanding Voltage: 1500V AC/minute

MATERIAL




Insulator: Nylon 66,UL94V-2

Contact pin: Brass

PIN	DIM.A	DIM.B	Tolerances
02	5.08	2.54	±0.20
03	7.62	5.08	
04	10.16	7.62	
05	12.70	10.16	
06	15.24	12.70	
07	17.78	15.24	±0.25
08	20.32	17.78	
09	22.86	20.32	
10	25.40	22.86	
11	27.94	25.40	
12	30.48	27.94	±0.45
13	33.02	30.48	
14	35.56	33.02	
15	38.10	35.56	
16	40.64	38.10	
17	43.18	40.64	±0.55
18	45.72	43.18	
19	48.26	45.72	
20	50.80	48.26	
21	53.34	50.80	
22	55.88	53.34	±0.55
23	58.42	55.88	
24	60.96	58.42	
25	63.50	60.96	

ORDER INFORMATION

5	W	2	5	4	8	C	3	-	1	X	X	T	0	W	A	L	H	0	1
Pitch 2.54mm					1:SingleRow		No. of contacts per row		T0:Tin Plated		W:Nylon natural		A:Tray W/O Cap		RoHS				

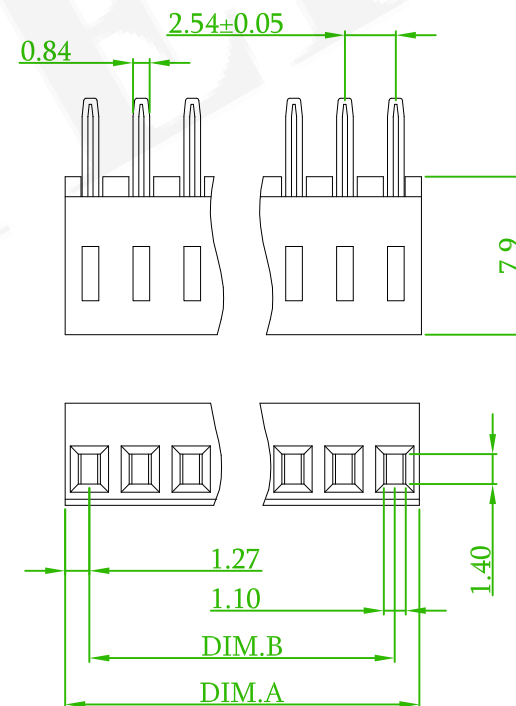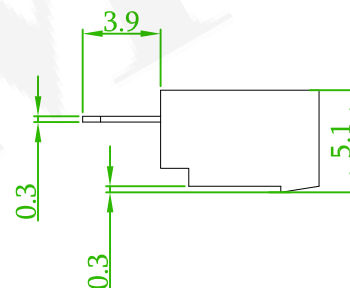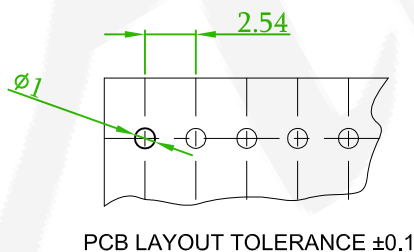

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	2.54mm IDC WAFER				頁數 Page	1/1
	品號 PART NO.	5W2548C3-1XXT0WALH01				繪圖 DRAWN	Andy 2012/09/19
	圖號 DRAWING NO.	GW021-AA061	版本 REV.	A	核對 CHECKED	Jason 2012/09/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2012/09/19	
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION		