

MATERIAL 
Contact: Phosphor Bronze
Insulator: LCP,UL94V-0

ORDER INFORMATION



5 W 3 0 0 0 S 2 - 2 X X T 0 B B U I 0 1

Pitch 3.0mm

2: Dual Row

No. of contacts
per row

T0: Tin Plated






B: Black

B: Bag Package

RoHS




No. of contacts	Dimensions	
	A	B
2x02	3.00	12.00
2x03	6.00	15.00
2x04	9.00	18.00
2x05	12.00	21.00
2x06	15.00	24.00
2x07	18.00	27.00
2x08	21.00	30.00
2x09	24.00	33.00
2x10	27.00	36.00
2x11	30.00	39.00
2x12	33.00	42.00

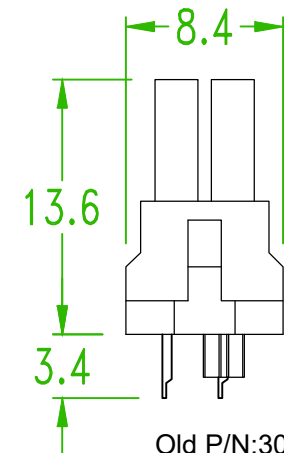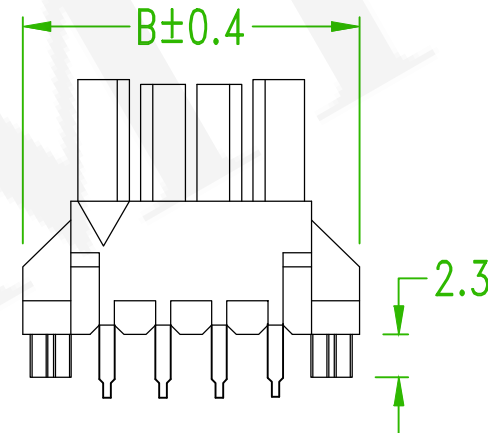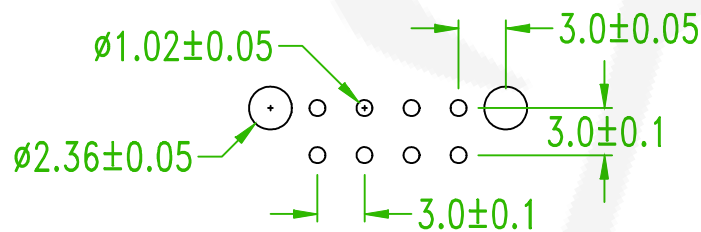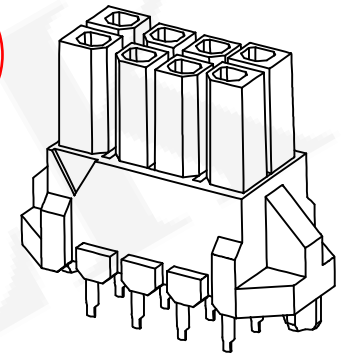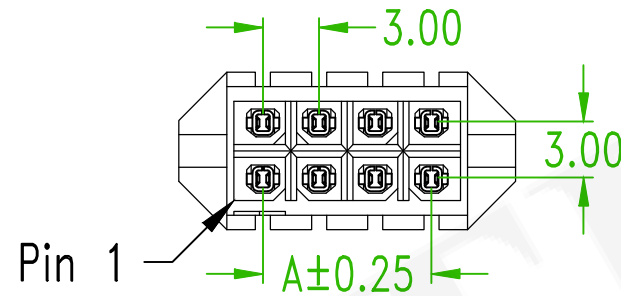

Old P/N: 3000SB-2XXXB-U

PCB Layout: Component side

Recommended PCB thickness: .062"(1.57mm)




品名 TITLE	3.0mm WAFER STRAIGHT				頁數 Page	1/2
品號 PART NO.	5W3000S2-2XXT0BBUI01				繪圖 DRAWN	Roy 2015/10/16
圖號 DRAWING NO.	GW080-EL334	版本 REV.	C	核對 CHECKED	John 2015/10/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/10/16	
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		

△x1	ECN NO.221123: Revise the specification	Rex	2023/01/31
△	Revised the Temperature Range: -40°C to +105°C → -25°C to +85°C	Eloise	2017/03 /20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



AMTEK 耀德
2023.03.07
Released DCC

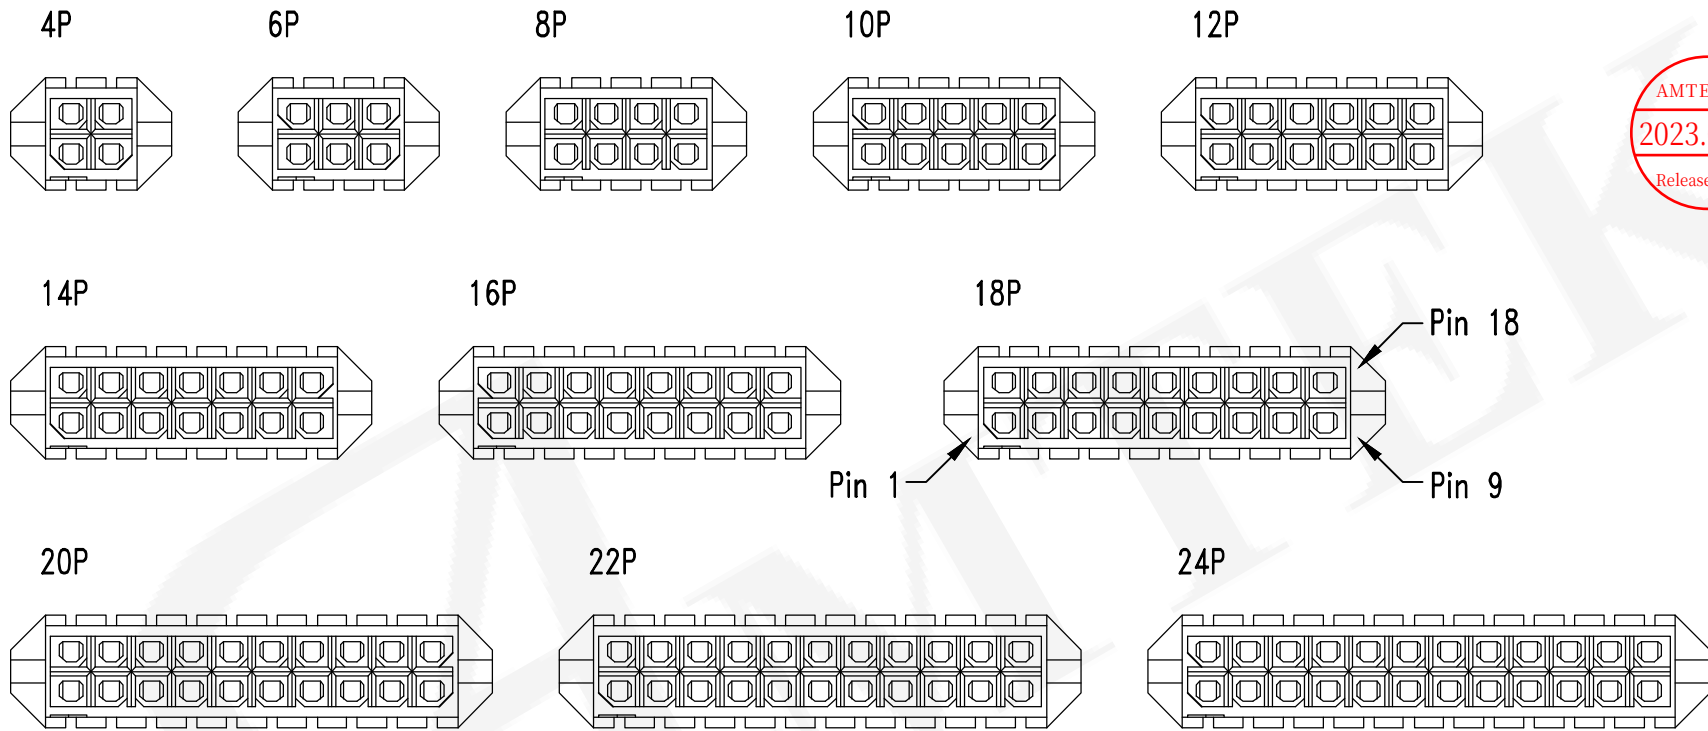

Old P/N:3000SB-2XXXB-U

	ECN NO.221123: Revise the specification	Rex	2023/01/31
	Revised the Temperature Range: -40°C to +105°C→ -25°C to +85°C	Eloise	2017/03 /20
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	3.0mm WAFER STRAIGHT				頁數 Page	2/2
	品號 PART NO.	5W3000S2-2XXT0BBUI01				繪圖 DRAWN	Roy 2015/10/16
	圖號 DRAWING NO.	GW080-EL334	版本 REV.	C	核對 CHECKED	John 2015/10/16	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/10/16	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		