

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 1400V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 3800V AC/minute


MATERIAL

Insultor:Hi-Temp. Thermoplastic,UL94V-0
Contact:Copper Alloy





ORDER INFORMATION

5 W 3 5 0 2 H 0 - 1 0 2 X X X X U A 0 1

1:Single Row No. of contacts per row T0:Tin Plated W:White H:Reel W/O Cap RoHS

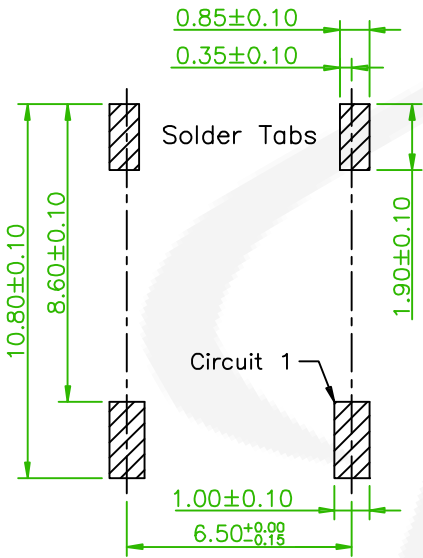

P.C.B LAYOUT

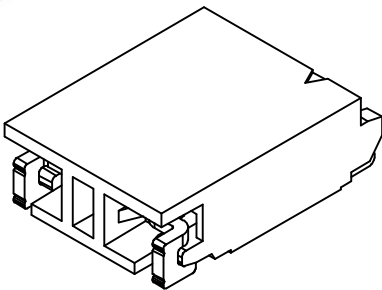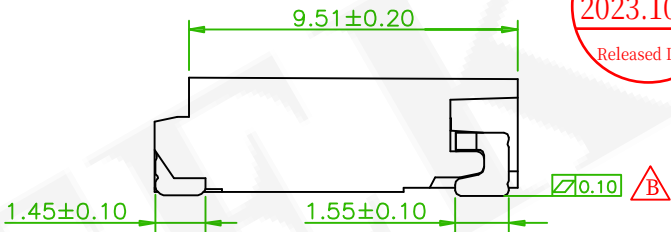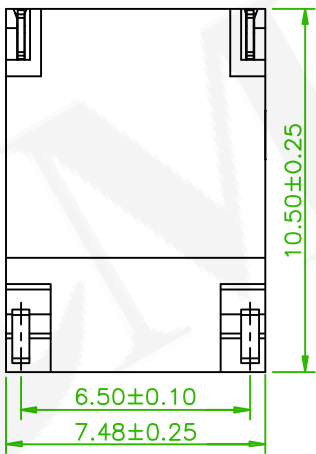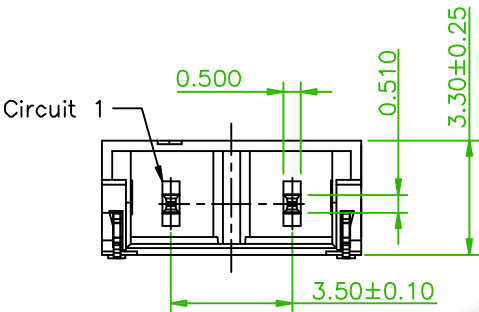

AMTEK 耀德
2023.10.27
Released DCC

Old Part No.:LCDMR-2P2TW-U

△	ECN NO.: 230923 Revise the drawing	Alice	2023/10/16
△x1	Add the Dimension	David	2020/11/13
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	3.5mm LCD COMNN. SMT R/A				頁數 Page	1/1
	品號 PART NO.	△ 5W3502H0-102XXXXUA01				繪圖 DRAWN	Roy 2016/08/17
	圖號 DRAWING NO.	GW090-DW352	版本 REV.	C	核對 CHECKED	Boris 2016/08/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/08/17	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 1°	單位 UNIT	mm	THIRD ANGLE PROJECTION	