

SPECIFICATIONS

Current Rating: 1A AC,DC
Voltage Rating: 1400V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 3800V AC/minute



MATERIAL

Terminal: Copper Alloy
Material:Nylon 6T,UL94V-0

ORDER INFORMATION

5 W 3 5 0 2 H 1 - 1 0 2 X X X X U A 0 1

1:Single Row	No. of contacts per row	T0: Tin Plated	W:White	R:T/R With CAP	RoHS
--------------	-------------------------	----------------	---------	----------------	------

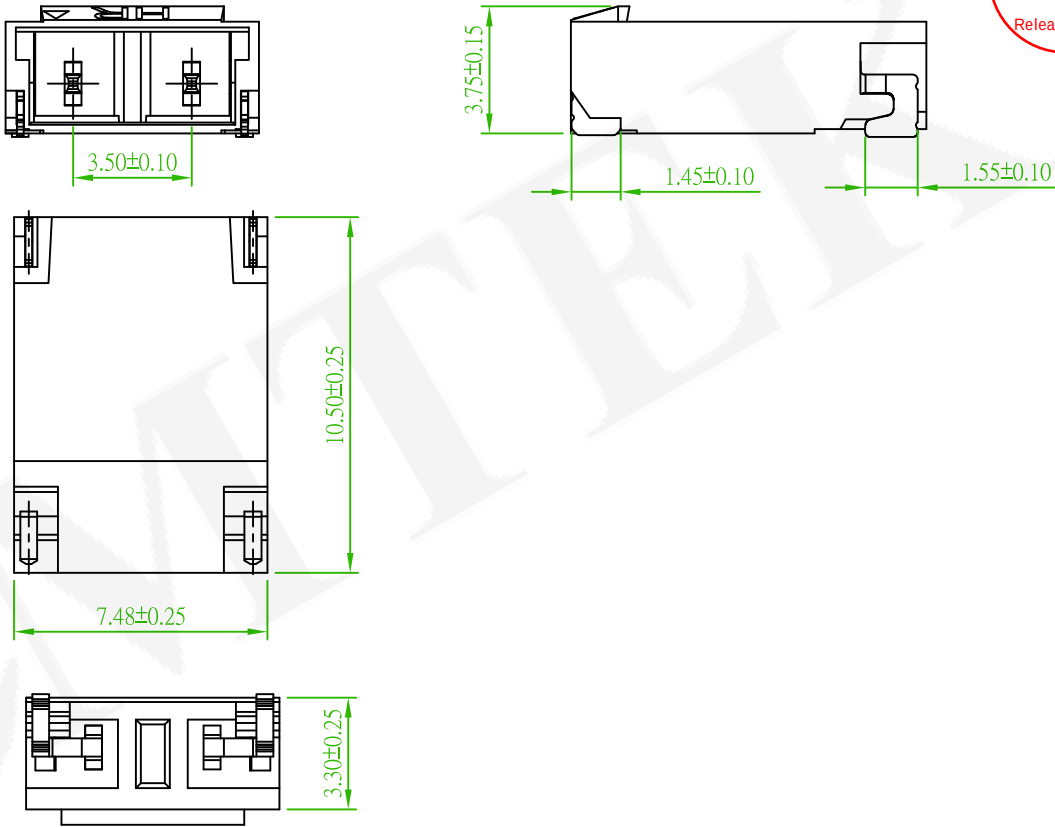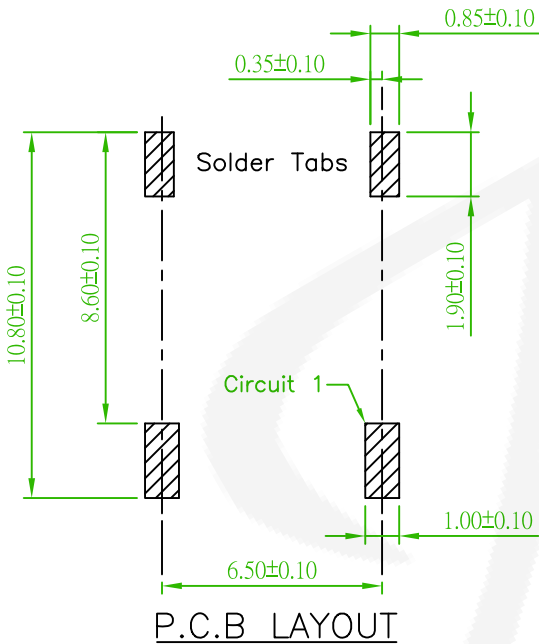

Old Part No.:LCDMRA-2P2TW-U

REV.	ECN NO.: 230923 Revise the drawing	Alice	2023/10/16
	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	LCD CONN. 3.5mm HOUSING				頁數 Page	1/1
	品號 PART NO.	5W3502H1-102XXXXUA01				繪圖 DRAWN	Vincetn 2007/12/18
	圖號 DRAWING NO.	GW090-EL085	版本 REV.	B	核對 CHECKED	Paul 2007/12/18	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/12/18	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		