

SPECIFICATIONS

Current Rating: 7A AC, DC

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Dielectric Voltage: 1500V AC for one minute

Operation Temperature: -25°C to +85°C

MATERIAL

Insulator: Nylon 66, UL94V-2

Contact: Brass

ORDER INFORMATION

5 W 3 9 6 1 R 0 - 1 X X T 0 X B L A 0 1

Pitch 3.96mm

1: Single Row

No. of contacts
per row

T0: Tin Plated

B: Black
W: Natural
(Transparent)

B: Bag Package

RoHS










AMTEK 耀德

2022.05.27

Released DCC

Circuit No.	Dimensions		Circuit No.	Dimensions	
	A	B		A	B
02P	3.96	7.92	12P	43.56	47.52
03P	7.92	11.88	13P	47.52	51.48
04P	11.88	15.84	14P	51.48	55.44
05P	15.84	19.80	15P	55.44	59.40
06P	19.80	23.76	16P	59.40	63.36
07P	23.76	27.72	17P	63.36	67.32
08P	27.72	31.68	18P	67.32	71.28
09P	31.68	35.64	19P	71.28	75.24
10P	35.64	39.60	20P	75.24	79.20
11P	39.60	43.56			

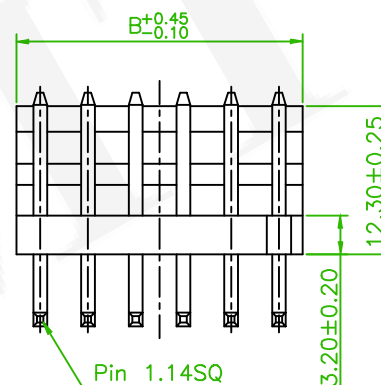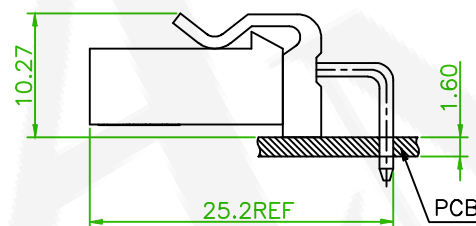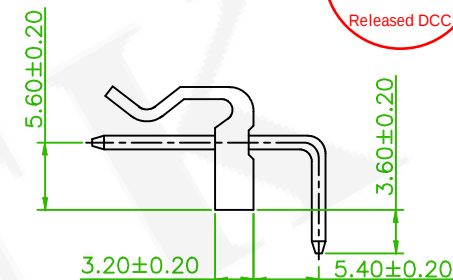

P.C.B. LAYOUT

Old Part No.: 3961RA-XX-L

REV.	ECN NO.: 220418 Revise the drawing	Alice	2022/05/19
	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	3.96mm WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W3961R0-1XXT0XBLA01				繪圖 DRAWN	Jeff 2017/01/11
	圖號 DRAWING NO.	GW090-JF119		版本 REV.	B	核對 CHECKED	Jonny 2017/01/11
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2017/01/11
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15		單位 UNIT	mm	THIRD ANGLE PROJECTION	