

SPECIFICATIONS

Current Rating: 5A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10MΩ Max

Insulation Resistance: 100MΩ Min


Withstanding Voltage: 1500V AC/minute

MATERIAL


Pin Material: Brass

Material: Nylon 66,UL94V-2


ORDER INFORMATION

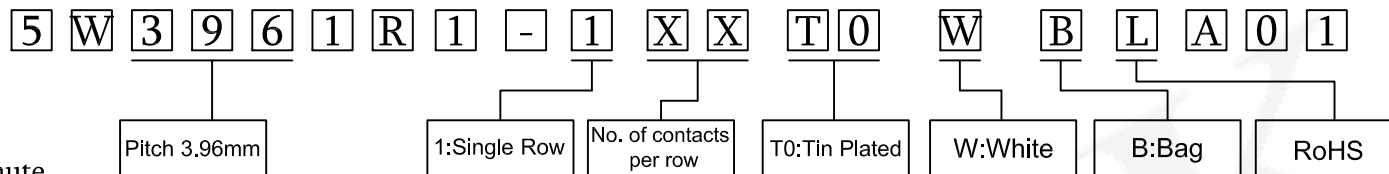

No.of contacts	Dimensions	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20



Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

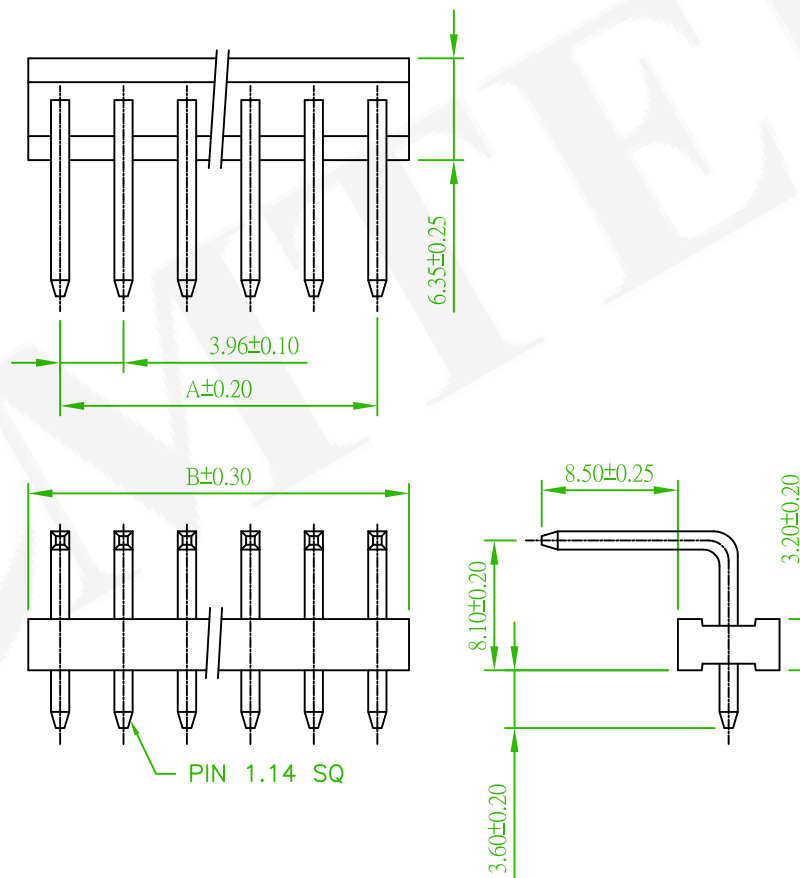

Old Part No.:3961RB-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	3.96mm WAFERRIGHT ANGLE				頁數 Page	1/1
	品號 PART NO.	5W3961R1-1XXT0WBLA01				繪圖 DRAWN	Jeff 2013/04/26
	圖號 DRAWING NO.	GW082-EL172	版本 REV.	A	核對 CHECKED	Paul 2013/04/26	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2013/04/26	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		