

Specifications

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Terminal: BRASS/Tin Plated

Material: Nylon 66,UL94V-2 or UL94V-0

ORDER INFORMATION

5 W 3 9 6 1 S 0 - 1 X X T 0
Pitch 3.96mm

1:Single Row

No. of contacts per row

T0:Tin Plated

W:Natural







B:Bag Package

L:Nylon 66

01:UL94V-2(Transparent)
02:UL94V-0(White)



No. of contacts	Dimensions	
	A	B
102	3.96	7.92
103	7.92	11.88
104	11.88	15.84
105	15.84	19.80
106	19.80	23.76
107	23.76	27.72
108	27.72	31.68
109	31.68	35.64
110	35.64	39.60
111	39.60	43.56
112	43.56	47.52
113	47.52	51.48
114	51.48	55.44
115	55.44	59.40
116	59.40	63.36
117	63.36	67.32
118	67.32	71.28
119	71.28	75.24
120	75.24	79.20

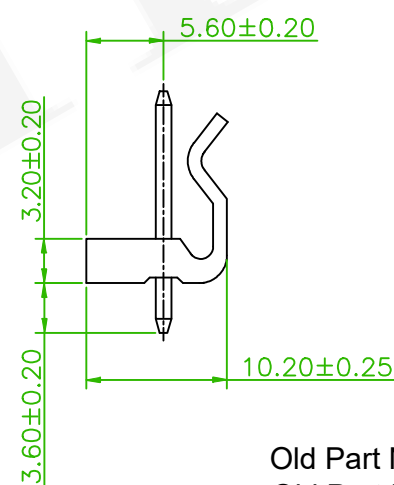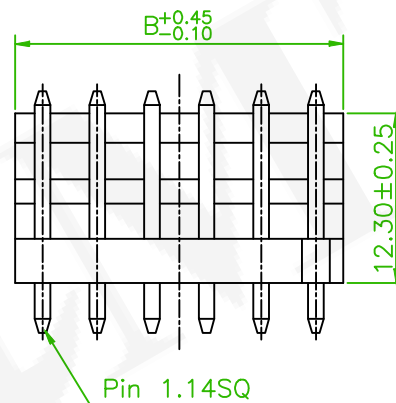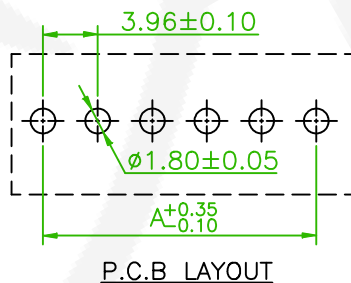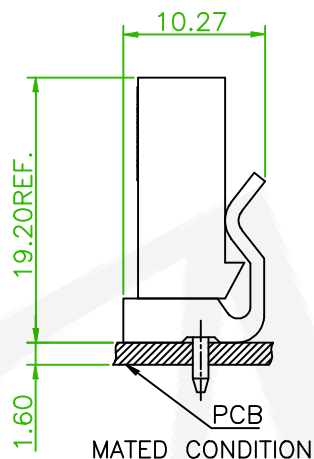

Old Part No.:3961SA-XXTW-U
Old Part No.:3961SA-XXTW-L



AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	3.96mm WAFER STRAIGHT				頁數 Page	1/1
品號 PART NO.	5W3961S0-1XXT0WBLAXX				繪圖 DRAWN	Jeff 2016/10/05
圖號 DRAWING NO.	GW090-DA141				核對 CHECKED	Johnny 2016/10/05
客戶品號 CUSTOMER P/N					承認 APPROVED	Aaron 2016/10/05
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	版本 REV.	D	比例 SCALE	單位 UNIT	THIRD ANGLE PROJECTION

△x4	Add the UL94V-0	Alice	2022/06/16
△x5	ECN NO.:220418 Revise the drawing	Alice	2022/05/19
△x3	Add the Material option(LCP),Revise the Part No.	Nick	2019/05/21
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE