

SPECIFICATIONS

Current Rating: 7A AC, DC

Voltage Rating: 250V AC,DC

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Dielectric Voltage: 1500V AC for one minute

Operation Temperature: -25°C to +85°C

MATERIAL

Insulator: Nylon 66, UL94V-0

Contact Pin: Brass

ORDER INFORMATION


5	W	3	9	6	2	R	0	-	1	X	X	T	0	X	B	L	A	0	1
1:Single Row			No. of Contacts per Row			T0:Tin Plated			 W:Natural R:Red			B:Bag			RoHS				



No. of Contacts	Dimensions(mm)	
	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

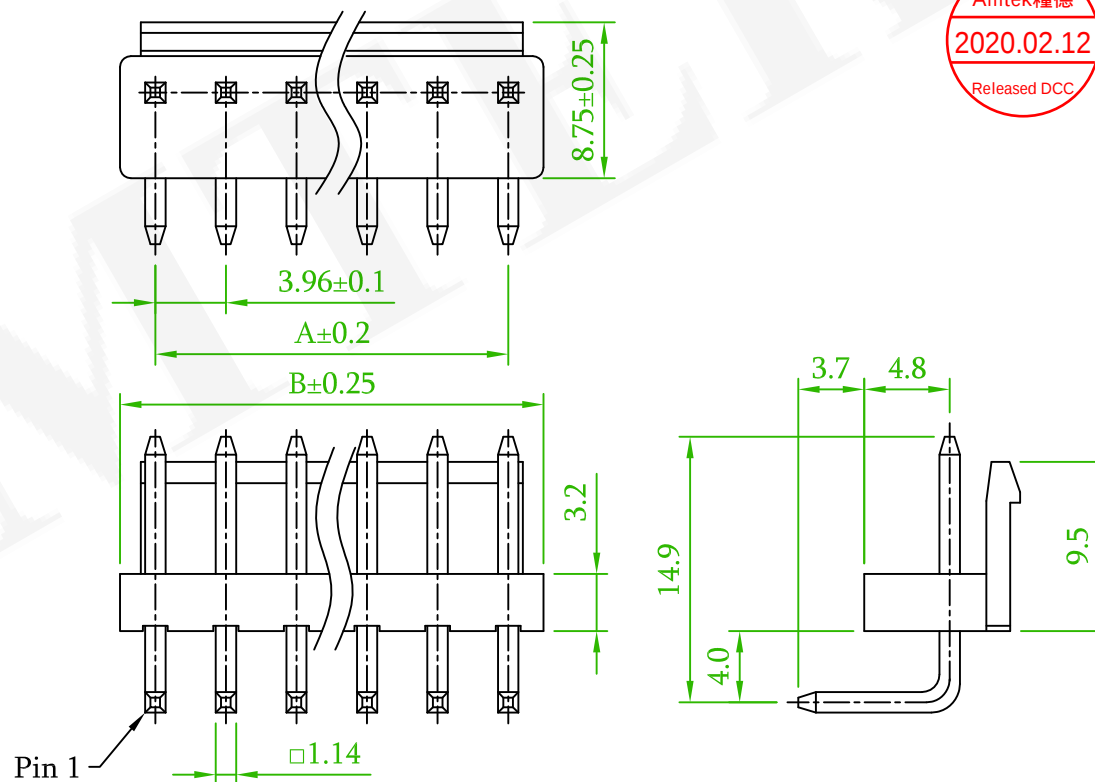

 x2	Add color option(R:Red),Revise the SPEC	Nick	2020/02/11
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	3.96mm WAFER S/R R/A DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5W3962R0-1XXT0XBLA01				繪圖 DRAWN	Gary 2018/08/30
	圖號 DRAWING NO.	GW090-GB362	版本 REV.	B	核對 CHECKED	Josh 2018/08/30	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/08/30	
	公差 TOLERANCE	.X ±0.25 .XX ±0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		