

SPECIFICATIONS

Current Rating: 5 AMP

Insulation Resistance: 1000MΩ Max.

Contact Resistance: 10mΩ Min.

Dielectric Voltage: 1500V AC for one minute

Operating Temperature: -25°C to +85°C

MATERIAL

Insulator: Nylon 66, UL94V-0

Contact Pin: Brass

ORDER INFORMATION

5 W 3 9 6 2 S 0 - 1 X X T 0 X B L A 0 1

1:Single Row

No. of contacts
per row(02-15)

T0:Tin Plated

◎W:White
R:Red

B:Bag

RoHS





AMTEK 糧德

2019.09.03

Released DCC



Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

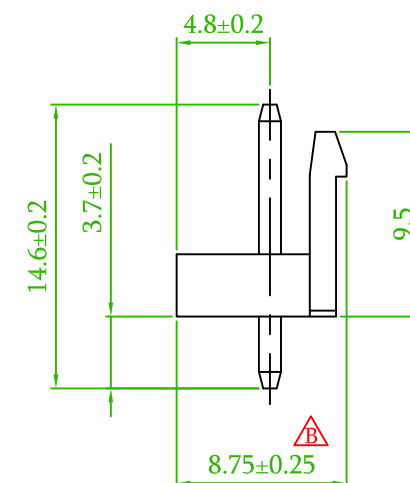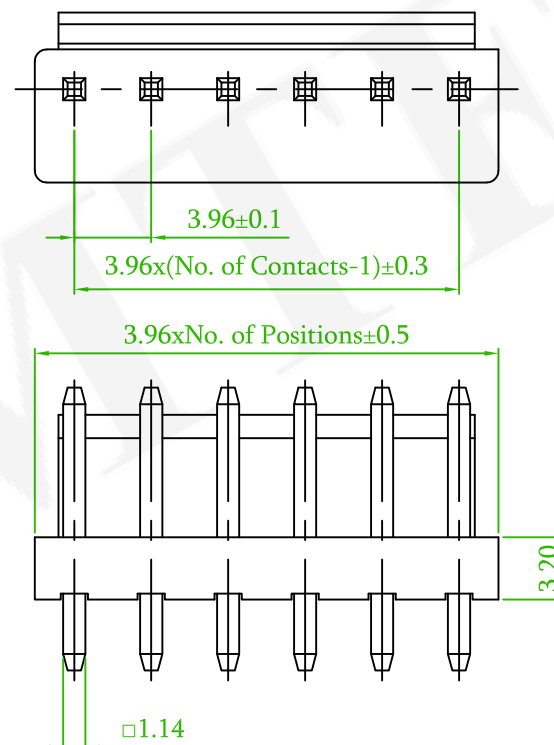

REV.	QEC.NO.190806:Revise the dimension position	Nick	2019/08/21
	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	WAFER 3.96mm				頁數 Page	1/1
	品號 PART NO.	5W3962S0-1XXT0XBLA01				繪圖 DRAWN	Roy
	圖號 DRAWING NO.	GW090-GA780	版本 REV.	B	核對 CHECKED	Paul	2014/11/18
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James	2014/11/18
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		