

Specifications


Current Rating: 4A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C to +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Terminal: Brass/Tin Plated
Material: Nylon 66,UL94V-2

ORDER INFORMATION


5	W	3	9	6	3	S	0	-	1	X	X	T	0	W	A	L	F	0	1
Pitch 3.96mm						1:Single Row		No. of contacts per row		T0:Tin Plated		W:White		A:Tray W/O Cap		RoHS			




Recommended P.C.B Layout

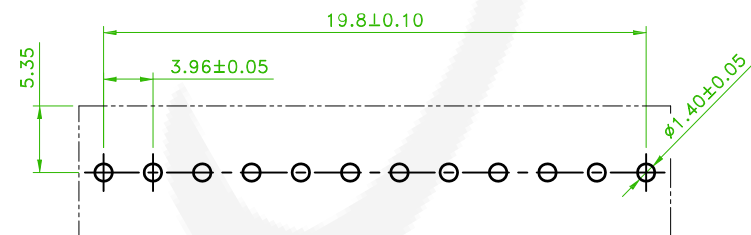


Recommended P.C.B Layout

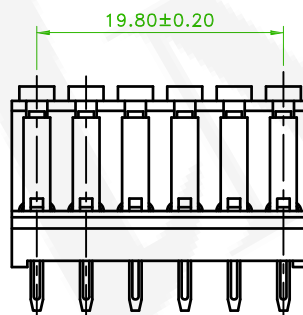

1x6 PIN

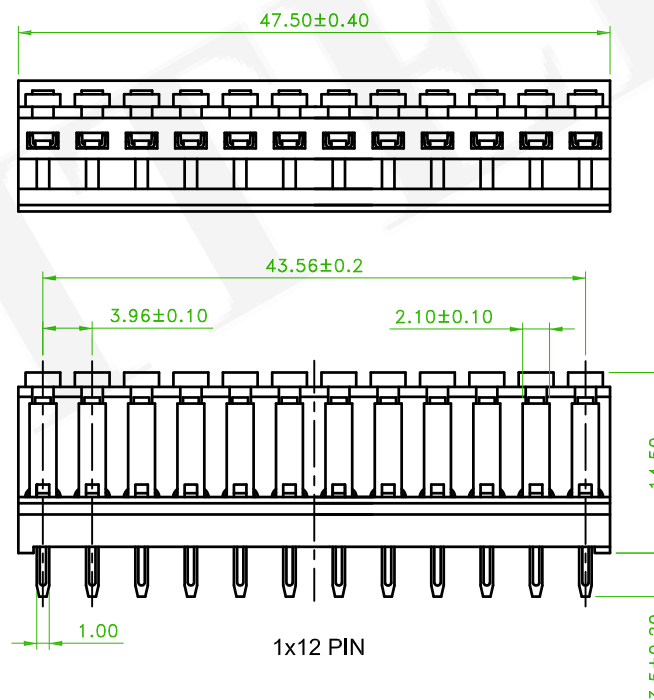

1x12 PIN



Old Part No.:3963SA-XXTWB-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	3.96mm WAFER STRAIGHT			頁數 Page	1/1
	品號 PART NO.	5W3963S0-1XXT0WALF01			繪圖 DRAWN	Sam
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Paul
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James
	公差 TOLERANCE	.X ± 0.30	單位 UNIT	mm	THIRD ANGLE PROJECTION	
		.XX ± 0.20				