


Specifications



Current Rating: 4A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Copper Alloy/Tin-plated
 Material: Nylon 66,UL94V-2

ORDER INFORMATION



5	W	3	9	6	3	S	1	-	1	X	X	T	0	W	A	L	F	0	1
Pitch 3.96mm					1:Single Row		No. of contacts per row		T0: Tin Plated		W: White		A: Tray W/O Cap		RoHS				

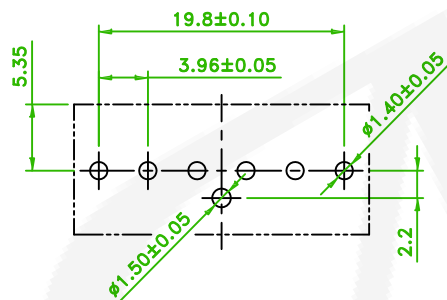



Recommended PCB Layout



1x6PIN

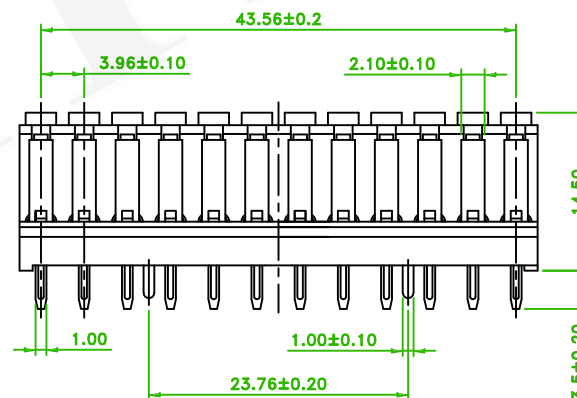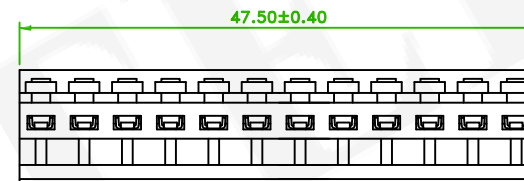

1x12PIN

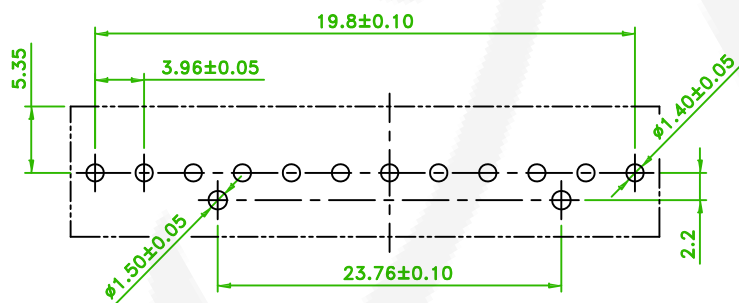

Recommended PCB Layout

Old Part No.:3963SA-XXTWA-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-8878 FAX: 886-2-2260-8030	品名 TITLE	3.96mm WAFER STRAIGHT			頁數 Page	1/1
	品號 PART NO.	5W3963S1-1XXT0WALF01			繪圖 DRAWN	Sam 2010/03/17
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Debby 2010/03/17
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/03/17
	公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION	