



SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 3mΩ Max
 Insulation Resistance: 5000MΩ Min
 Withstanding Voltage: 2200V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Color: Natural(White)


ORDER INFORMATION

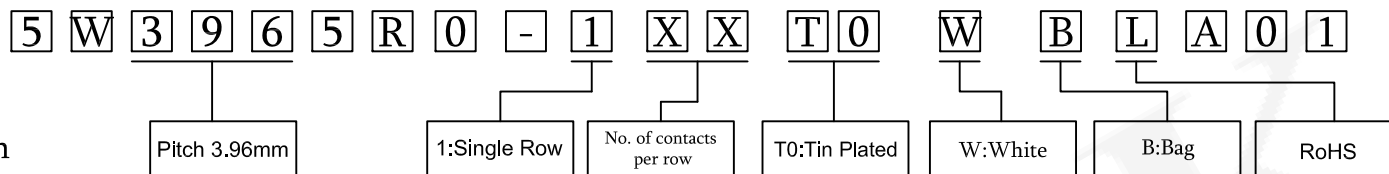

No. of contacts	Dimensions	
	Dim.A	Dim.B
102	3.96	7.92
103	7.92	11.88
104	11.88	15.84
105	15.84	19.80
106	19.80	23.76
107	23.76	27.72
108	27.72	31.68
109	31.68	35.64
110	35.64	39.60
111	39.60	43.56
112	43.56	47.52
113	47.52	51.48
114	51.48	55.44
115	55.44	59.40
116	59.40	63.36
117	63.36	67.32
118	67.32	71.28
119	71.28	75.24
120	75.24	79.20

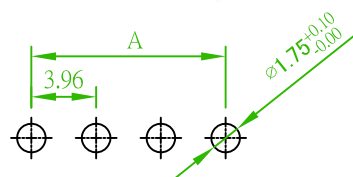

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

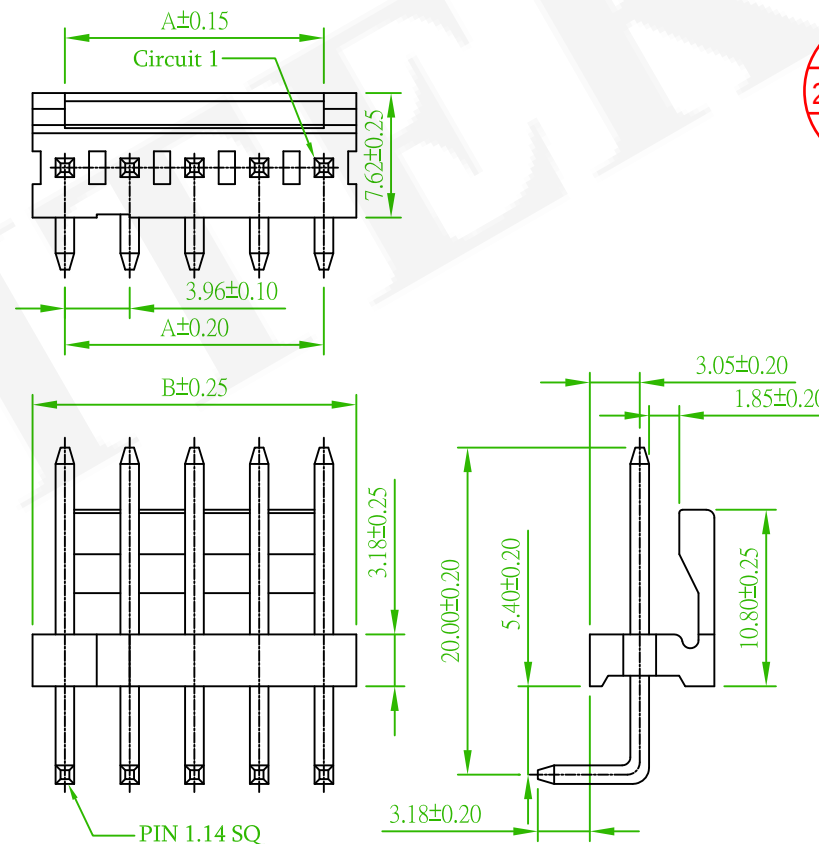

Old Part No.:3965R-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	3.96mm WAFER RIGHT ANGLE			頁數 Page	1/1
	品號 PART NO.	5W3965R0-1XXT0WBLA01			繪圖 DRAWN	Jeff
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Jenny
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	