

Pin Material: 
Brass/Tin-plated

Material:
Nylon 66,UL94V-2

ORDER INFORMATION

5 W 4 2 0 0 K 0 - 2 X X T 0 W X L C 0 1

Pitch 4.20mm

2: Dual Row

No. of contacts
per row

T0: Tin Plated

W: White




A: Tray W/O
Cap(2x3-2x12 pin)

RoHS

B: Bag



No. of contacts	Dimensions	
	A	B
2x01		5.4
2x02	4.2	9.6
2x03	8.4	13.8
2x04	12.6	18.0
2x05	16.8	22.2
2x06	21.0	26.4
2x07	25.2	30.6
2x08	29.4	34.8
2x09	33.6	39.0
2x10	37.8	43.2
2x11	42.0	47.4
2x12	46.2	51.6

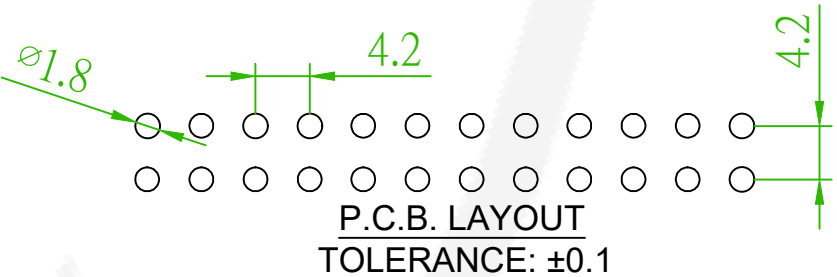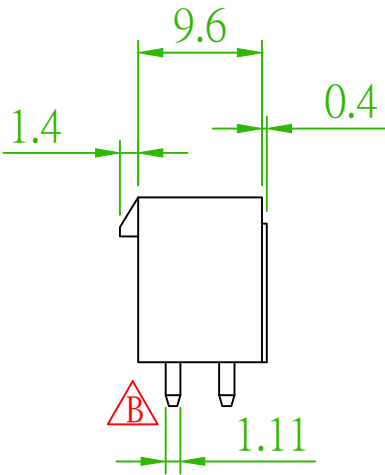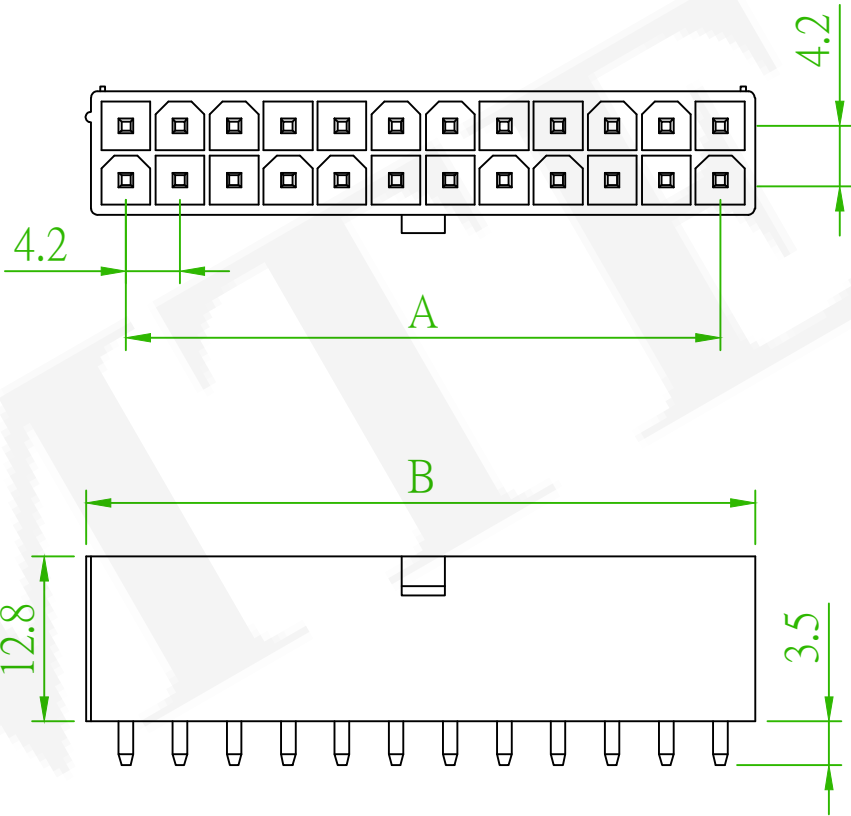

Old P/N:4200SQ-2XXTW2-L

 x1	ECN NO.221122: Revise the specification.	Rex	2022/12/20
 x2	Add the package -> B: bag, and modify the part number.	Gary	2017/07/10
 x1	Revised the Drawing	Jeff	2016/12/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	4.2mm WAFER STRAIGHT SQ PIN				頁數 Page	1/1
品號 PART NO.	 5W4200K0-2XXT0WXLC01				繪圖 DRAWN	Jeff 2016/10/27
圖號 DRAWING NO.	GW083-JF104		版本 REV.	D	核對 CHECKED	Johnny 2016/10/27
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/10/27
公差 TOLERANCE	.X ± 0.40 .XXX ± 0.08 .XX ± 0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION	