

MATERIAL

Insulator: Nylon 66, UL94V-2 or UL94V-0
Contact Pin: Brass

ORDER INFORMATION

5 W 4 2 0 0 L X - 1 X X T 0

0, 1, 2

1:Single Row

No. of Contacts
per Row(02-12)

T0:Tin Plated

W:White
R:Red

B:Bag
A:Tray


RoHS

01:UL94V-2
02:UL94V-0





USE With #16AMG


Contact	2 ~ 3	4 ~ 6	7 ~ 10	11 ~ 12
AMP	9A	8A	7A	6A

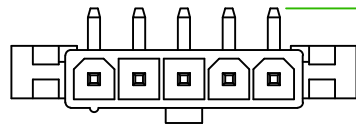




5W4200L2-1XXT0WXLCO1

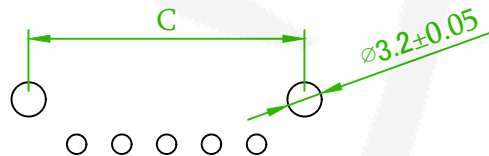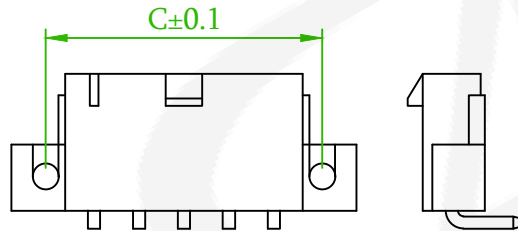



Recommended PCB Layout
(PCB TOLERANCE ±0.1)



5W4200L1-1XXT0WXLCO1

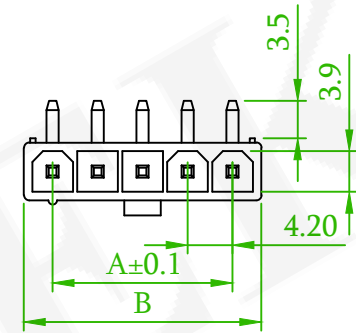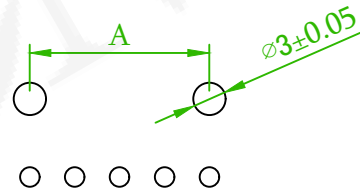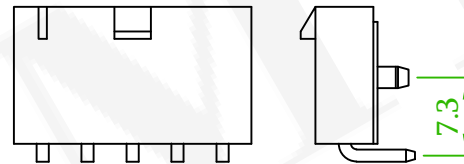

5W4200L0-1XXT0WXLCO1

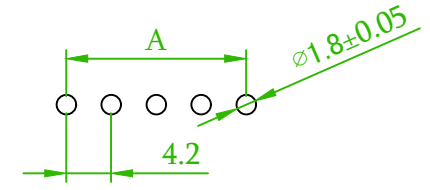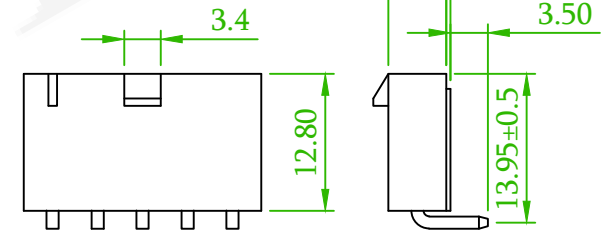

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 x1	ECN NO.221122: Revise the specification	Rex	2022/12/22
 x4	Add: Insulator, R:Red, Specifications	David	2020/05/25



Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	4.2mm WAFER S/R R/A DIP TYPE					頁數 Page	1/2
品號 PART NO.	5W4200LX-1XXT0XXLCXX					繪圖 DRAWN	Sinnys 2010/06/17
圖號 DRAWING NO.	GW083-GB005		版本 REV.	C	核對 CHECKED	Joel 2010/06/17	
客戶品號 CUSTOMER P/N			比例 SCALE	1:1	承認 APPROVED	James 2010/06/17	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION		



Dimensional Information (mm)

Contacts	Dim. A	Dim. B	Dim. C
2	4.2	9.6	13.2
3	8.4	13.8	17.4
4	12.6	18.0	21.6
5	16.8	22.2	25.8
6	21.0	26.4	30.0
7	25.2	30.6	34.2
8	29.4	34.8	38.4
9	33.6	39.0	42.6
10	37.8	43.2	46.8
11	42.0	47.4	51.0
12	46.2	51.6	55.2

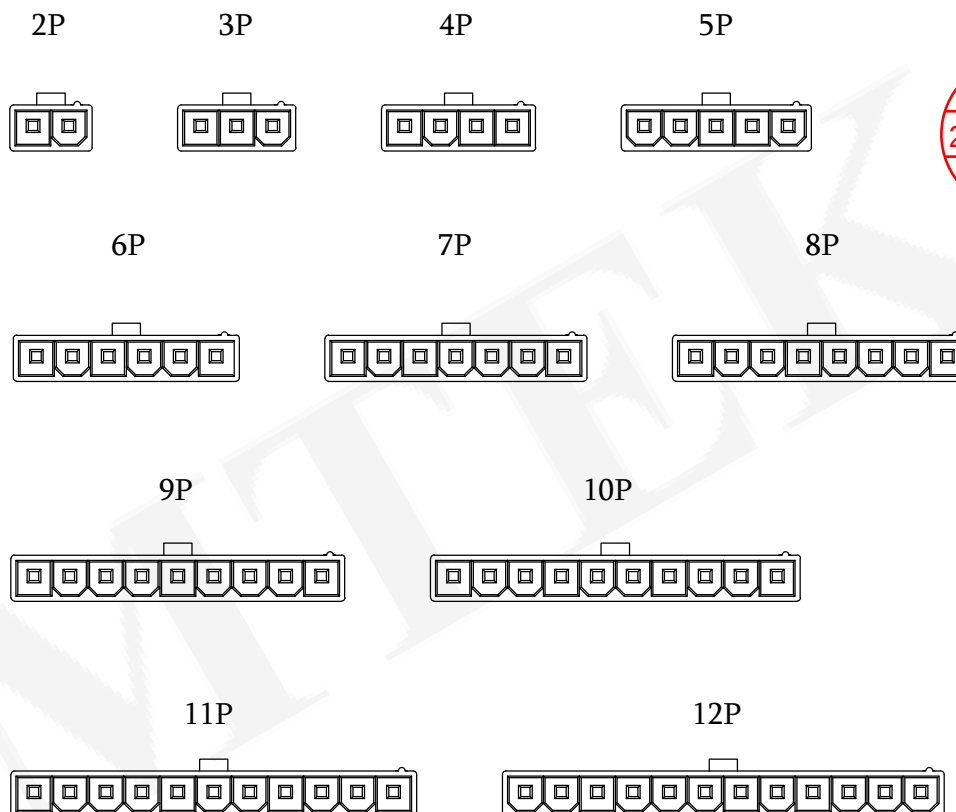

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	4.2mm WAFER S/R R/A DIP TYPE				頁數 Page	2/2
	品號 PART NO.	5W4200LX-1XXT0XXLCXX				繪圖 DRAWN	Sinnys 2010/06/17
	圖號 DRAWING NO.	GW083-GB005	版本 REV.	C	核對 CHECKED	Joel 2010/06/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	1:1	承認 APPROVED	James 2010/06/17	
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

 x1	ECN NO.221122: Revise the specification	Rex	2022/12/22
 x4	Add: Insulator, R:Red, Specifications	David	2020/05/25
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE