

MATERIAL

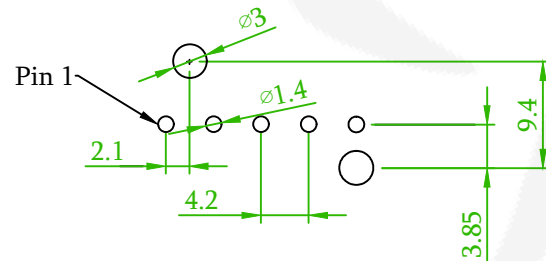

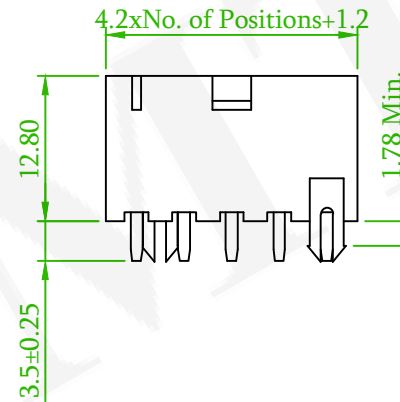
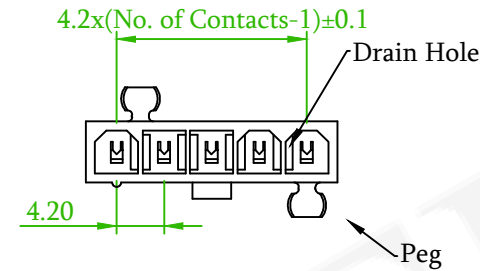
Insulator: Nylon 66, UL94V-2 or UL94V-0

Contact Pin: Brass

ORDER INFORMATION

5	W	4	2	0	0	S	1	-	1	X	X	T	0	W	X	L	C	0	X
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

1:SingleRow	No. of contacts per row(02-12)	T0:Tin Plated	W:White	A:Tray W/O CAP B:Bag	RoHS	01:UL94V-2 02:UL94V-0
-------------	--------------------------------	---------------	---------	-------------------------	------	--------------------------

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No.:4200S-1XXTW1-L

 x1	ECN NO.221122: Revise the specification	Rex	2022/12/26
 x3	Add the UL94V-0 Options	Alice	2021/10/15
 x1	Add the package: B: Bag.	Gary	2017/12/01
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	4.2mm WAFER				頁數 Page	1/1
品號 PART NO.	 5W4200S1-1XXT0WXLC0X			繪圖 DRAWN	Eloise 2016/12/28	
圖號 DRAWING NO.	GW083-EL184			版本 REV.	D	Jonny 2016/12/28
客戶品號 CUSTOMER P/N				比例 SCALE	None	Aaron 2016/12/28
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25			單位 UNIT	mm	THIRD ANGLE PROJECTION 