

Material 
Nylon 66, UL94V-2

ORDER INFORMATION

5 W 4 2 0 0 S 4 - 2 X X T 0 W A L C 0 1

Pitch 4.20mm

No. of contacts
per row

T0: Tin Plated


W: White

A: Tray W/O
Cap



L: RoHs



AMTEK 耀德
2023.02.23
Released DCC






2X02P

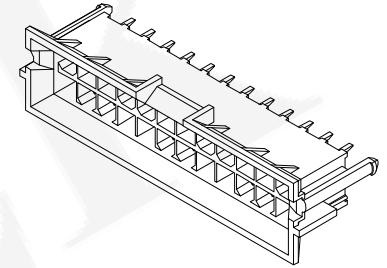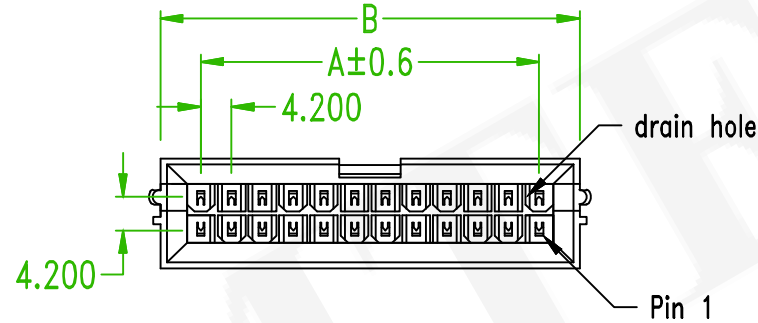

2X12P

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
			10	16.8	28.2	18	33.6	45.2
4	4.2	15.5	12	21.0	32.4	20	37.8	49.5
6	8.4	19.7	14	25.2	36.6	22	42.0	53.7
8	12.6	23.9	16	29.4	41.0	24	46.2	57.9

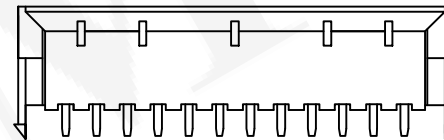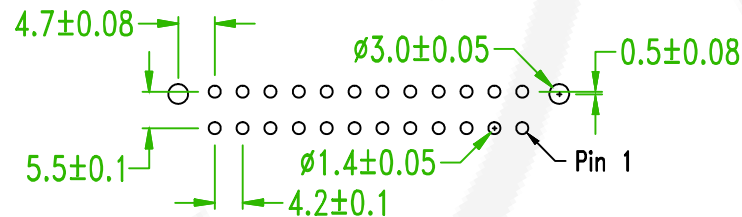

Old P/N: 4200SA-2XXTW1-L

Recommended hole layout for .070"(1.78mm) Max. thickness P. C. board

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	4.2mm Wafer Straight				頁數 Page	1/2
	品號 PART NO.	5W4200S4-2XXT0WALC01				繪圖 DRAWN	Jeff 2016/12/15
	圖號 DRAWING NO.	GW083-RE110		版本 REV.	B	核對 CHECKED	Johnny 2016/12/15
	客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/12/15
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25 .XXX ± 0.10		單位 UNIT	mm	THIRD ANGLE PROJECTION	

ECN NO.221122: Revise the specification

Rex

2022/12/26

ECN NO. OR DESCRIPTION

REVISED

DATE