

Specifications

Current Rating:10A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C to +85°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute




Material: Nylon 66,UL94V-2

ORDER INFORMATION




5 W 5 0 8 2 D 0 - 1 0 4 T 0 W B L A 0 1 - C V - X



1:Through type
2:End type

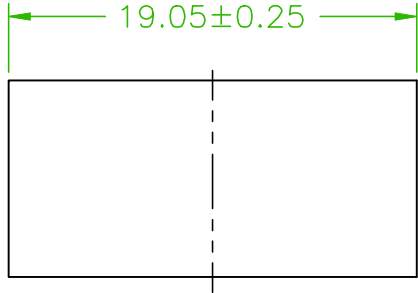

5W5082D0-104T0WBLA01-CV-1
(Through type)

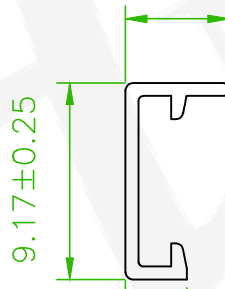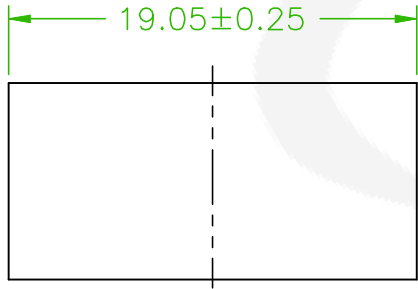

5W5082D0-104T0WBLA01-CV-2
(End type)



Old Part No.:5083IDC-C-L

	ECN NO.: 231128 Revise the PART NO	Gaby	2024/01/08
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.0mm WAFER RIGHT ANGLE				頁數 Page	1/1
品號 PART NO.	5W5082D0-104T0WBLA01-CV-X			繪圖 DRAWN	Roy 2016/04/27	
圖號 DRAWING NO.	GW090-GY407			版本 REV.	B	核對 CHECKED
客戶品號 CUSTOMER P/N				比例 SCALE	None	承認 APPROVED
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		