

SPECIFICATIONS



Current Rating: 10A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute

MATERIAL



Pin Material: Brass
Material:Nylon 66,UL94V-2

ORDER INFORMATION

5	W	5	0	8	2	R	0	-	1	0	4	T	0	W	A	L	A	0	1
Pitch 5.08mm					1:Single Row		No. of contacts per row		T0:Tin Plated		W:White		A:Tray Without CAP		RoHS				

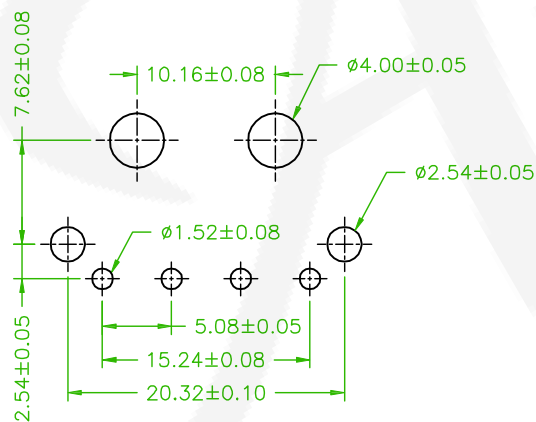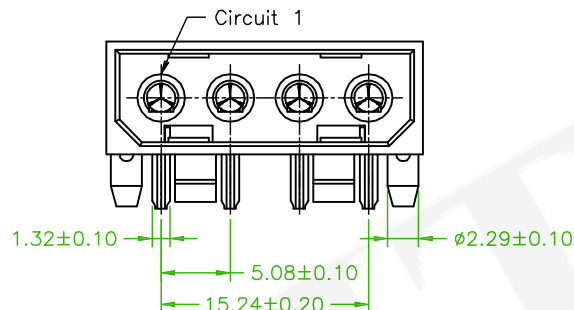

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

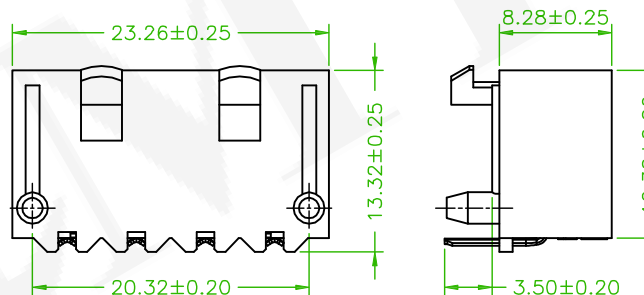

Old Part No.:5082R-04TW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.08mm WAFER RIGHT ANGLE				頁數 Page	1/1
	品號 PART NO.	5W5082R0-104T0WALA01				繪圖 DRAWN	Joe 2010/08/12
	圖號 DRAWING NO.	GW090-EL050	版本 REV.	A	核對 CHECKED	Joel 2010/08/12	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2010/08/12	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		