

SPECIFICATIONS



Current Rating: 10A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute

MATERIAL

Terminal: Copper Alloy
Material: Nylon 66,UL94V-2

ORDER INFORMATION

5	W	5	0	8	2	S	0	-	1	0	4	T	0	W	A	L	A	0	1
Pitch 5.08mm				1:Single Row		No. of contacts per row		T0:Tin Plated		W:White		A:Tray Without CAP		RoHS					

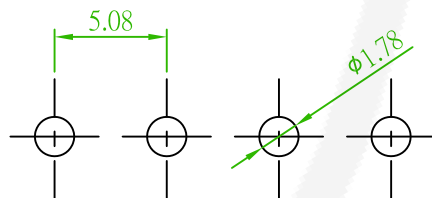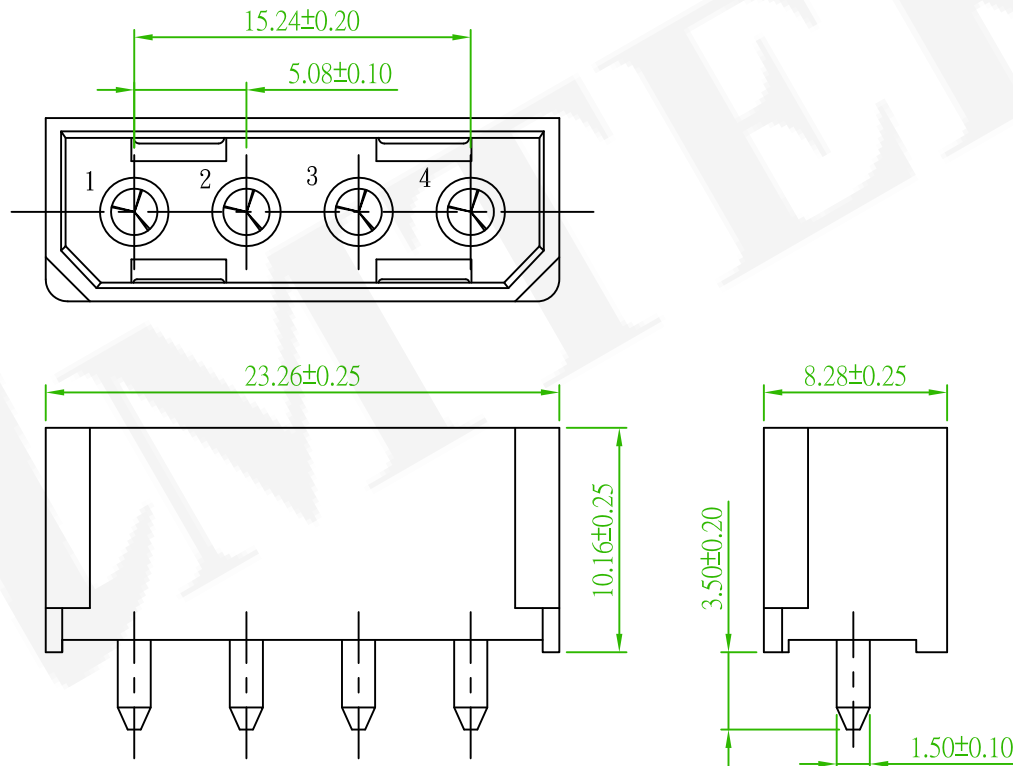

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)



Old Part No.:5082S-04TW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.08mm WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W5082S0-104T0WALA01				繪圖 DRAWN	Kent 2006/04/28
	圖號 DRAWING NO.	GW090-EL051	版本 REV.	A	核對 CHECKED	Paul 2006/04/28	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2006/04/28	
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		