



SPECIFICATIONS

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 100MΩ Min
Withstanding Voltage: 1500V AC/minute
Solder Tabs: Brass/Tin-plated
Material:Nylon 66,UL94V-2

ORDER INFORMATION

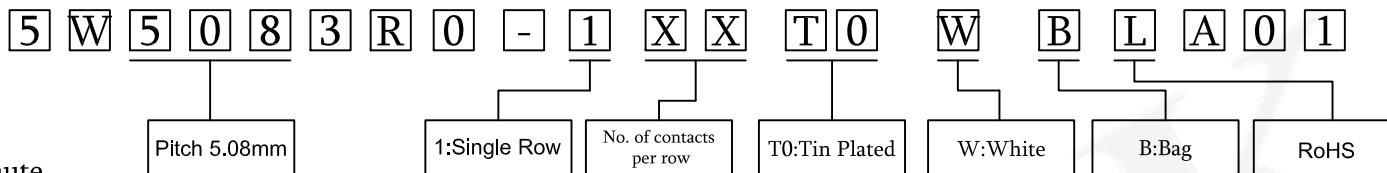

No. of contacts	Dimensions	
	A	B
02	5.08	10.16
03	10.16	15.24
04	15.24	20.32
05	20.32	25.40
06	25.40	30.48
07	30.48	35.56
08	35.56	40.64
09	40.64	45.72
10	45.72	50.80
11	50.80	55.88
12	55.88	60.96
13	60.96	66.04
14	66.04	71.12
15	71.12	76.20
16	76.20	81.28
17	81.28	86.36
18	86.36	91.44
19	91.44	96.52
20	96.52	101.60

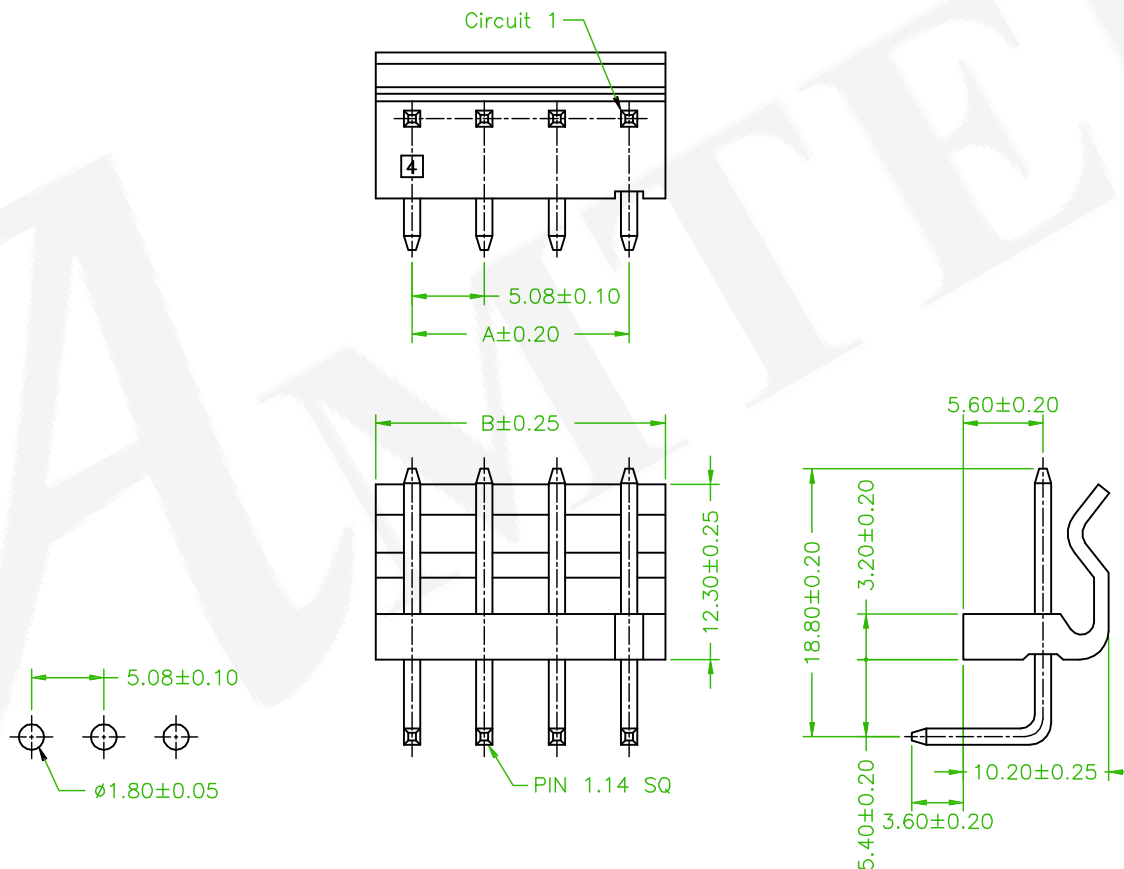

Old Part No.:5083RA-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.08mm WAFER R/A TYPE				頁數 Page	1/1
	品號 PART NO.	5W5083R0-1XXT0WBLA01				繪圖 DRAWN	Eloise 2016/11/18
	圖號 DRAWING NO.	GW090-JF023	版本 REV.	A	核對 CHECKED	Jonny 2016/11/18	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/11/18	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		