






SPECIFICATIONS

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin-Plated
Material: Nylon 66,UL94V-2

ORDER INFORMATION

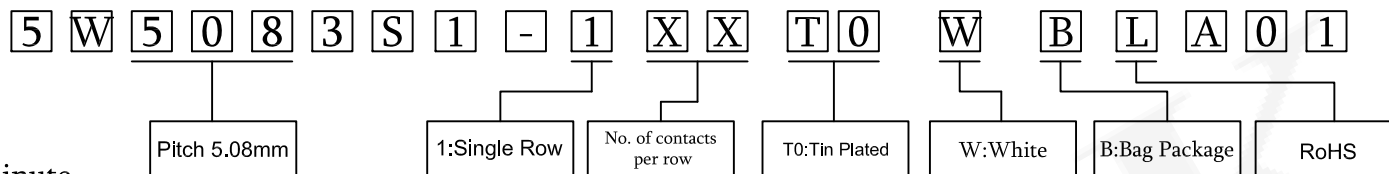

No. of contacts	Dimensions	
	A	B
102	5.08	10.16
103	10.16	15.24
104	15.24	20.32
105	20.32	25.40
106	25.40	30.48
107	30.48	35.56
108	35.56	40.64
109	40.64	45.72

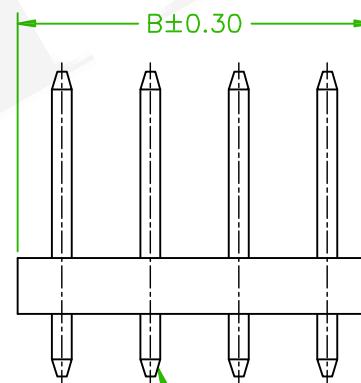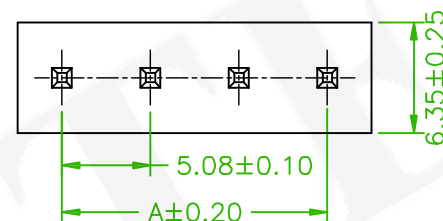

P.C.B. LAYOUT



Old Part No.:5083SB-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.08mm WAFER STRAIGHT				頁數 Page	1/1
	品號 PART NO.	5W5083S1-1XXT0WBLA01				繪圖 DRAWN	Jeff
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED		Johnny
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED		Aaron
	公差 TOLERANCE	.X ±0.25 .XX ±0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION		