


SPECIFICATIONS




Current Rating: 7A AC,DC
Voltage rating: 250V AC. Max
Insulation Resistance: 5000MΩ Min.
Contact Resistance: 10mΩ Max.
Dielectric Voltage: 1500V AC for one minute
Operation Temperature: -40°C to +105°C

ORDER INFORMATION

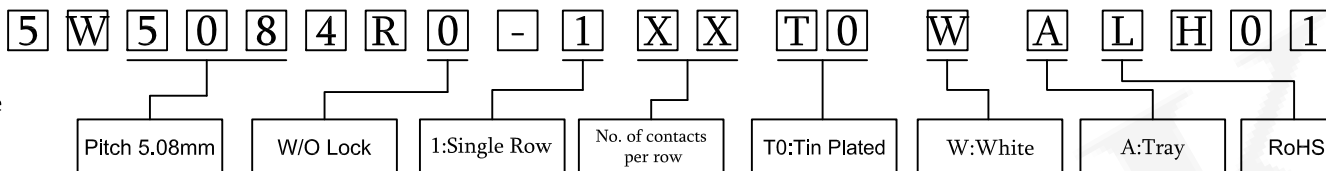

MATERIAL

Insulator:Nylon 66,UL94V-2
Contact:Brass
Mates with .045"[1.14mm] square pins or round pins

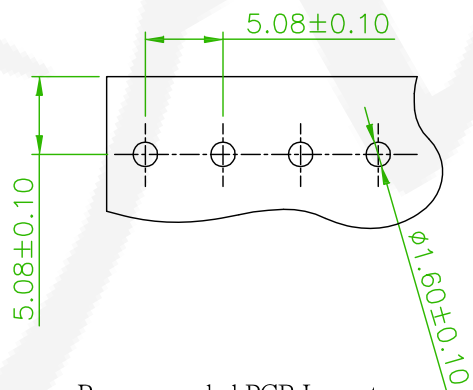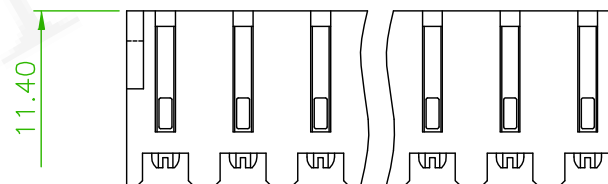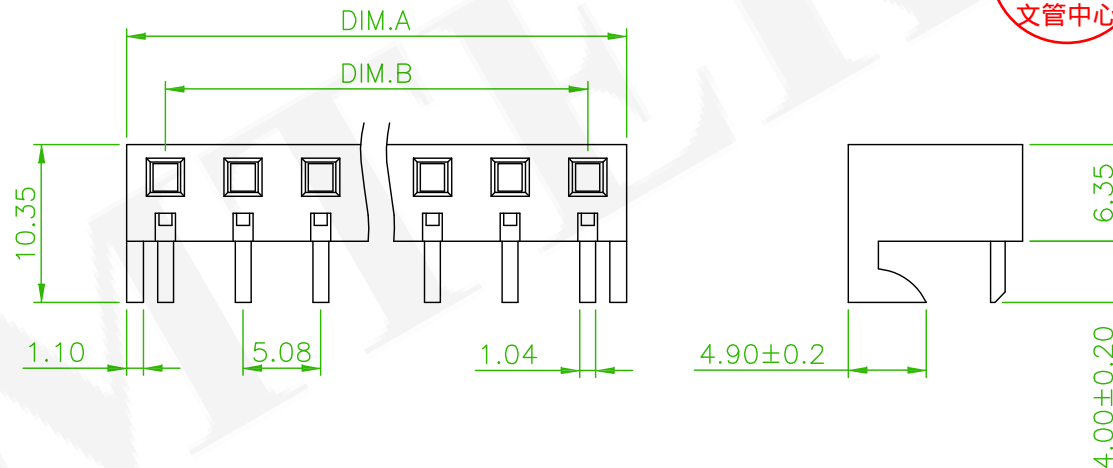

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

PIN	DIM.A	DIM.B	Tolerances
02	10.16	5.08	±0.25
03	15.24	10.16	
04	20.32	15.24	
05	25.40	20.32	
06	30.48	25.40	
07	35.56	30.48	±0.30
08	40.64	35.56	
09	45.72	40.64	
10	50.80	45.72	
11	55.88	50.80	
12	60.96	55.88	±0.36
13	66.04	60.96	
14	71.12	66.04	
15	76.20	71.12	
16	81.28	76.20	
17	86.36	81.28	±0.42
18	91.44	86.36	
19	96.52	91.44	
20	101.6	96.52	±0.42

Old Part NO.:5084A-XX-2-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.08mm WAFER			頁數 Page	1/1
	品號 PART NO.	5W5084R0-1XXT0WALH01			繪圖 DRAWN	Roy 2015/02/16
	圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	John 2015/02/16
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/02/16
	公差 TOLERANCE	.X ±0.20 .XX ±0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION	