

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage rating: 250V AC. Max

Insulation Resistance: 5000MΩ Min.

Contact Resistance: 10mΩ Max.

Dielectric Voltage: 1500V AC for one minute

Operation Temperature:-40°C to +105°C

ORDER INFORMATION

5	W	5	0	8	4	R	1	-	1	X	X	T	0	W	A	L	H	0	1
Pitch 5.08mm				With Lock			1:Single Row		No. of contacts per row		T0:Tin Plated			W:White		A:Tray		RoHS	



MATERIAL


Insulator:Nylon 66,UL94V-2

Contact:Brass

Mates with .045"[1.14mm] square pins or round pins

Applicable PC board thickness: .063"[1.6mm]




PIN 數	DIM.A	DIM.B	Tolerances
02	10.16	5.08	±0.25
03	15.24	10.16	
04	20.32	15.24	
05	25.40	20.32	
06	30.48	25.40	
07	35.56	30.48	
08	40.64	35.56	±0.30
09	45.72	40.64	
10	50.80	45.72	
11	55.88	50.80	
12	60.96	55.88	
13	66.04	60.96	
14	71.12	66.04	±0.36
15	76.20	71.12	
16	81.28	76.20	
17	86.36	81.28	
18	91.44	86.36	
19	96.52	91.44	
20	101.6	96.52	±0.42

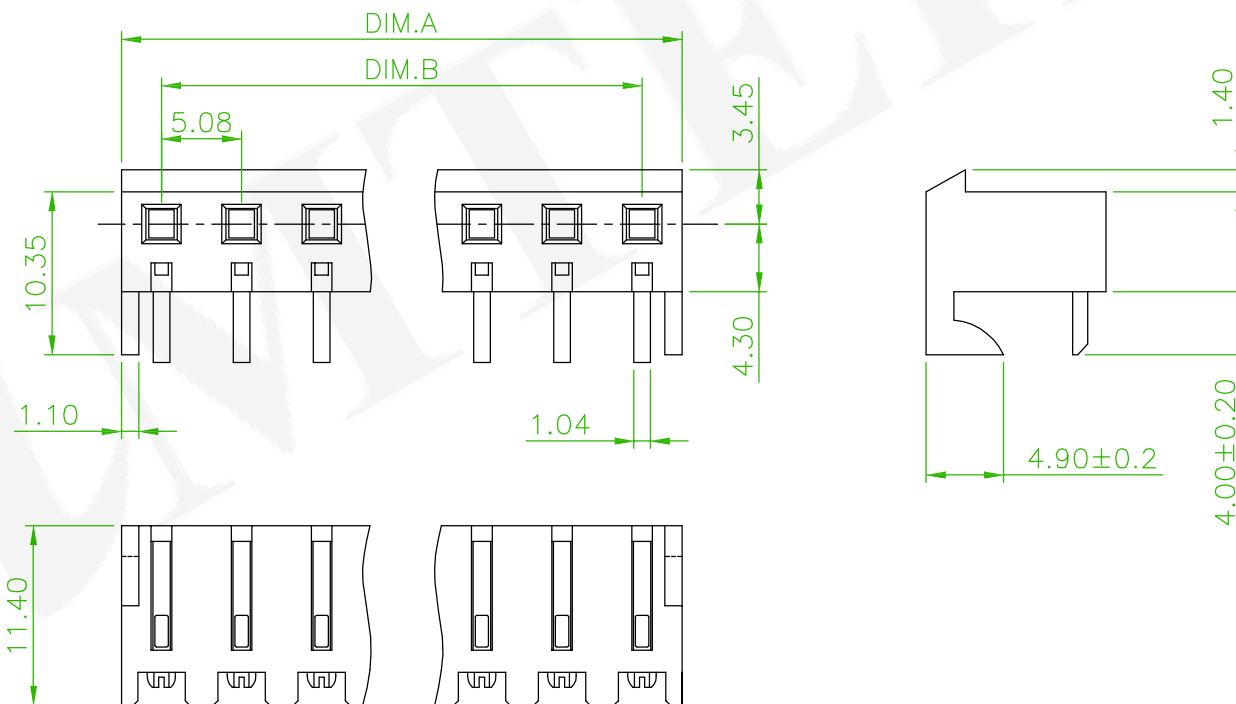

Old Part NO.:5084A-XX-1-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	5.08mm WAFER				頁數 Page	1/2
	品號 PART NO.	5W5084R1-1XXT0WALH01				繪圖 DRAWN	Roy 2015/10/20
	圖號 DRAWING NO.	GW021-BN209	版本 REV.	B	核對 CHECKED	John 2015/10/20	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/10/20	
	公差 TOLERANCE	.X ±0.35 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO.: 200418 Add the Page 2. Plastic appearance	Benson	2020/06/16
	ECN NO. OR DESCRIPTION	REVISED	DATE

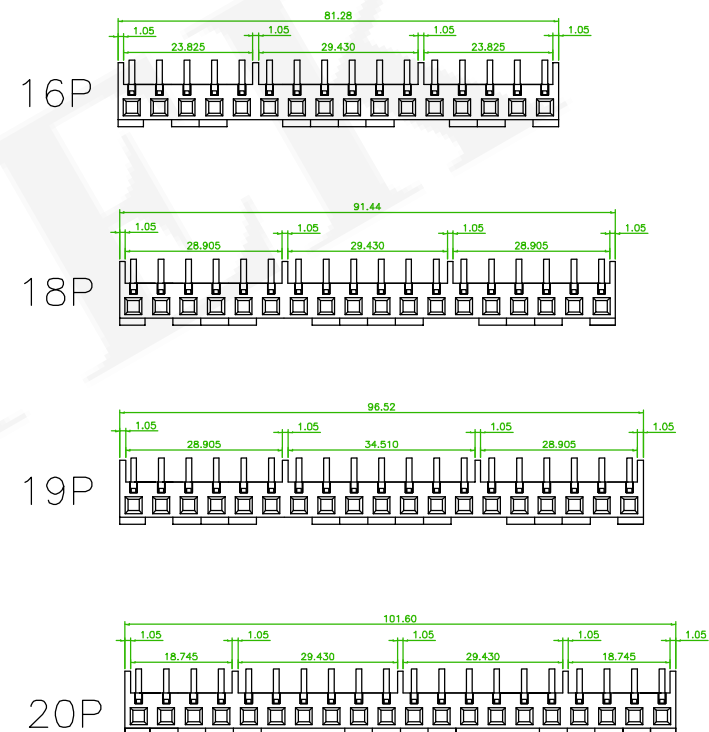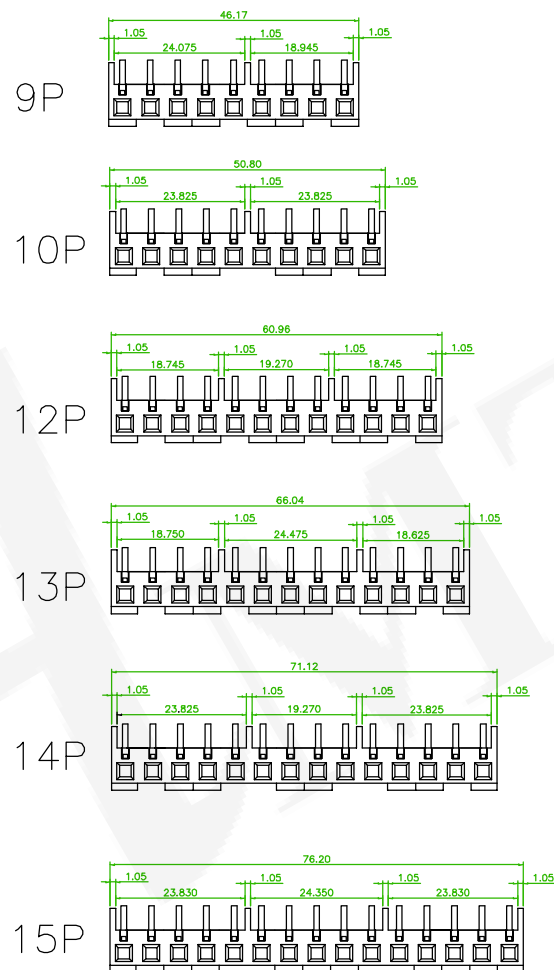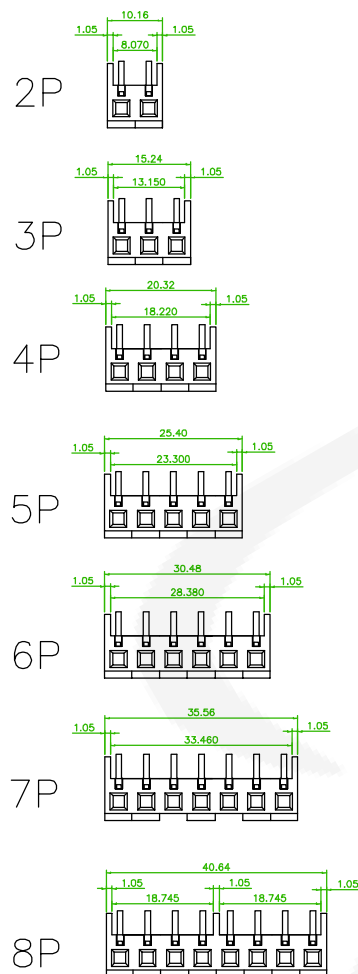

Old Part NO.:5084A-XX-1-L

△x1	ECN NO.: 200418 Add the Page 2. Plastic appearance	Benson	2020/06/16
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	5.08mm WAFER				頁數 Page	2/2
品號 PART NO.	5W5084R1-1XXT0WALH01			繪圖 DRAWN	Kent 2007/01/16	
圖號 DRAWING NO.	GW021-BN209	版本 REV.	B	核對 CHECKED	Paul 2007/01/16	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/01/16	
公差 TOLERANCE	.X ±0.35 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		