

SPECIFICATIONS

Current Rating: 7A AC,DC

Voltage rating: 250V AC. Max


Insulation Resistance: 5000MΩ Min.

Contact Resistance: 10mΩ Max.

Dielectric Voltage: 1500V AC for one minute

Operation Temperature:-40°C to +105°C

ORDER INFORMATION

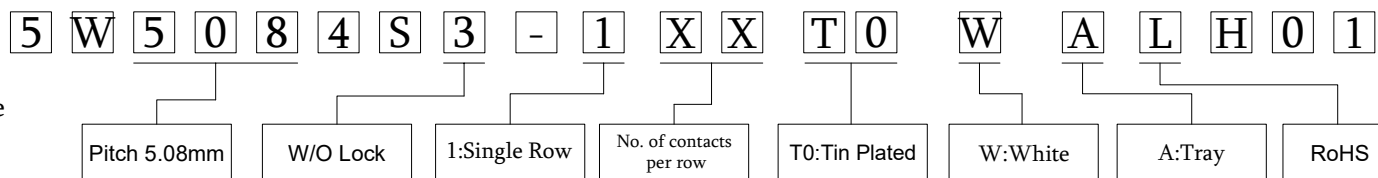

MATERIAL

Insulator:Nylon 66,UL94V-2


Contact:Brass

Mates with .045"[1.14mm] square pins or round pins




Applicable PC board thickness: .063"[1.6mm]



POS.	DIMENSION	
	A	B
2	5.08	10.16
3	10.16	15.24
4	15.24	20.32
5	20.32	25.40
6	25.40	30.48
7	30.48	35.56
8	35.56	40.64
9	40.64	45.72
10	45.72	50.80
11	50.80	55.88
12	55.88	60.96

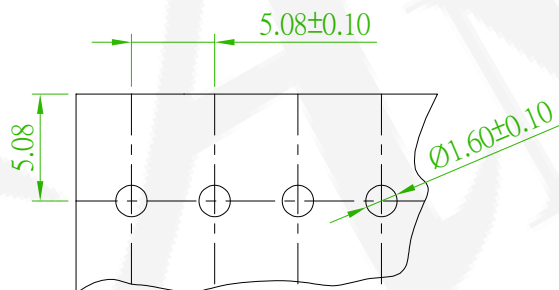

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

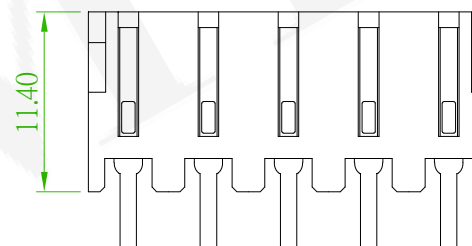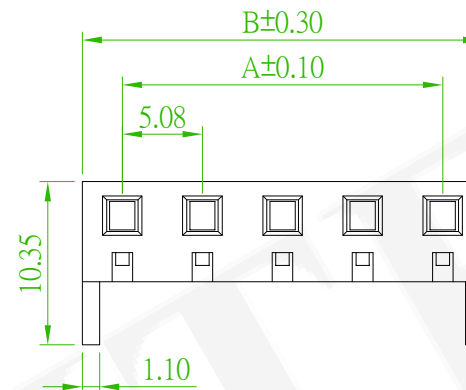

Old Part NO.:5084C-XX-2-L

REV.	ECN NO.:230830 Revise the drawing	Randy	2023/09/14
	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	5.08mm WAFER				頁數 Page	1/1
品號 PART NO.	5W5084S3-1XXT0WALH01		繪圖 DRAWN	Kent 2007/01/16		
圖號 DRAWING NO.	GW090-EL326		版本 REV.	B	核對 CHECKED	Paul 2007/01/16
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	James 2007/01/16
公差 TOLERANCE	.X ±0.35 .XX ±0.25		單位 UNIT	mm	THIRD ANGLE PROJECTION	