

SPECIFICATIONS

Current Rating: 13A(2~4P), 11A(6~10P)

Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.

Operation Temperature: -55°C to 105°C

Dielectric Voltage: 5000V AC for one minute

MATERIAL

Contact Pin: Phosphor Bronze

Insulator: Nylon 66, UL 94V-0

ORDER INFORMATION

5 W 6 3 5 0 R F - 1 X X T 0 W A L C 0 3

Pitch 6.35mm

1:Single Row


No. of contacts
per row(02~10)

T0:Tin Plated


W:Natural

A:Tray

RoHS

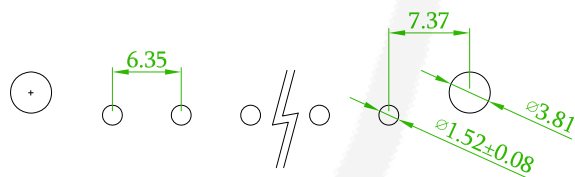

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

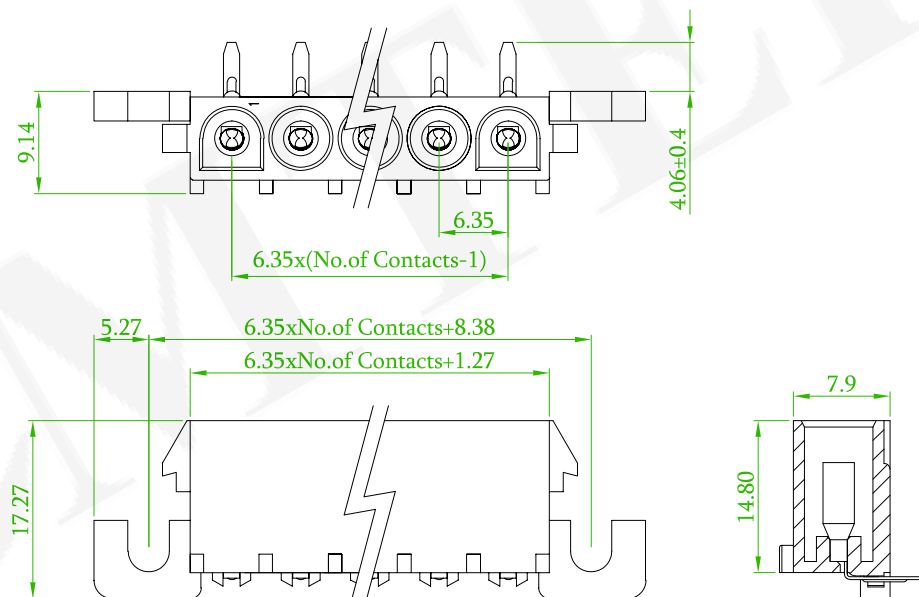

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 耀德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	6.35mm WAFER S/R R/A DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5W6350RF-1XXT0WALC03				繪圖 DRAWN	Gary 2018/10/03
	圖號 DRAWING NO.	GW083-GB440	版本 REV.	A	核對 CHECKED	Josh 2018/10/03	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/10/03	
	公差 TOLERANCE	.X ± 0.4 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		