

SPECIFICATIONS

Current Rating: 13A(2~4P), 11A(6~10P)

Insulation Resistance: 1000MΩ Max.

Contact Resistance: 10mΩ Min. $\triangle$

Operation Temperature: -55°C to 105°C

Dielectric Voltage: 5000V AC for one minute

MATERIAL

Contact Pin: Phosphor Bronze

Insulator: Nylon 66, UL94V-0 $\triangle$

ORDER INFORMATION

5 W 6 3 5 0 R M - 1 X X T 0 W A L C 0 1

1:Single Row

No. of contacts
per row(02~10)

T0: Tin Plated

W: White

$\triangle$ A: Tray


RoHS



AMTEK 糧德

2020.05.14

Released DCC

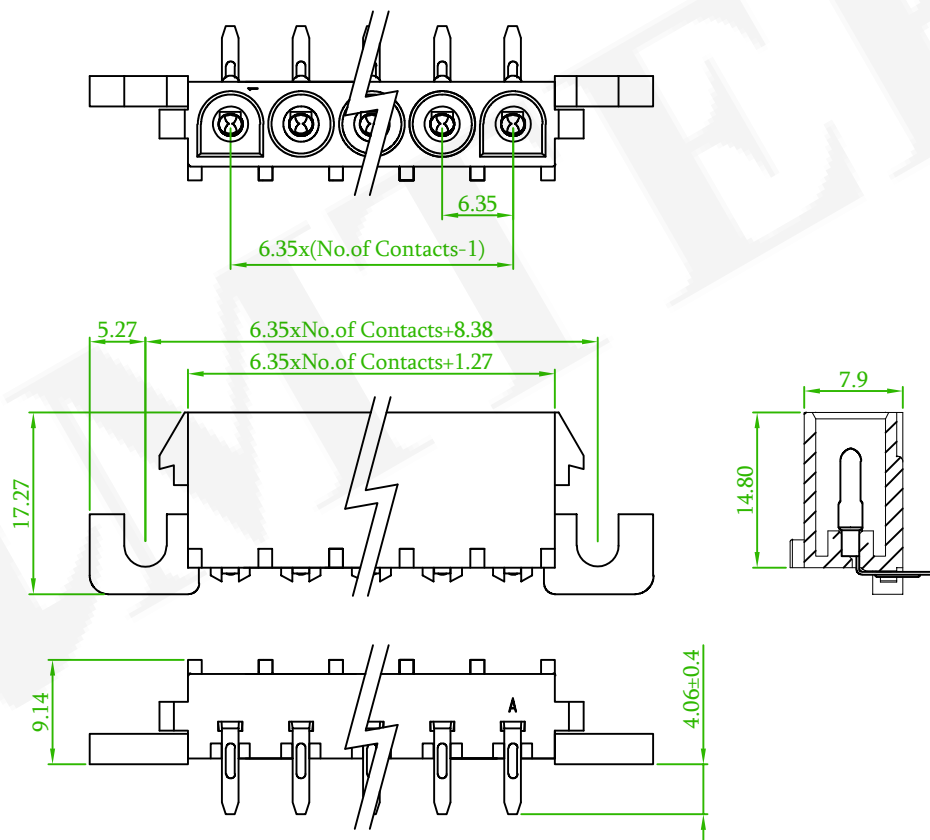

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

Old Part No.: 6350R-M1XXTW-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	6.35mm WAFER S/R R/A DIP TYPE				頁數 Page	1/1
	品號 PART NO.	5W6350RM-1XXT0WALC01				繪圖 DRAWN	Eloise 2016/11/17
	圖號 DRAWING NO.	GW083-JF202	版本 REV.	C	核對 CHECKED	Jason 2018/03/01	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/03/01	
	公差 TOLERANCE	.X ± 0.4 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		

$\triangle$ x2	ECR NO: 180127, revise the package: B:Bag -> A:Tray, revise specification.	Gary	2018/03/01
$\triangle$ x1	Revised Option: UL 94-2->UL 94-0	Jeff	2017/03/06
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE