

SPECIFICATIONS

Current Rating: 13A(2~4P),11A(6~10P)

Voltage Rating: 600V AC,DC

Temperature Range: -55°C ~105°C

Withstanding Voltage: 5000V AC/minute

Contact Material: Phosphor Bronze

Material: Nylon 66,UL 94V-2/UL 94V-0 

ORDER INFORMATION

5 W 6 3 5 0 S F - 3 X X X X X L C 0 X

Pitch 6.35mm

3:Triple Row

No. of contacts
per row






T0:Tin Plated

W:White

B:Bag Package

RoHS

1:With Peg,V-2
2:W/O Peg,V-2
3:With Peg,V-0
4:W/O Peg,V-0 

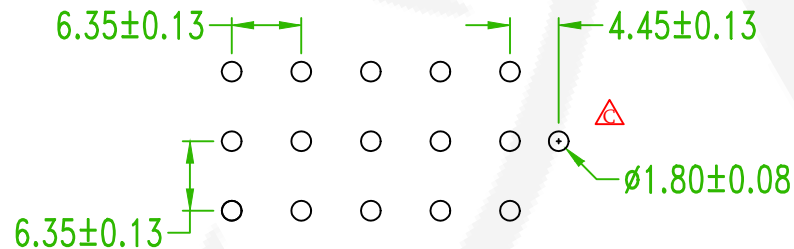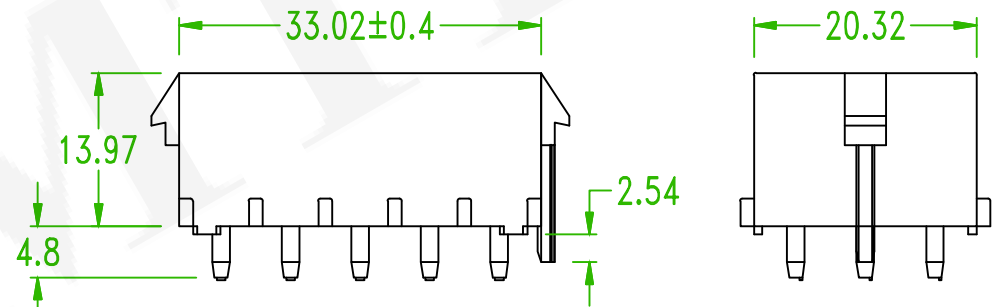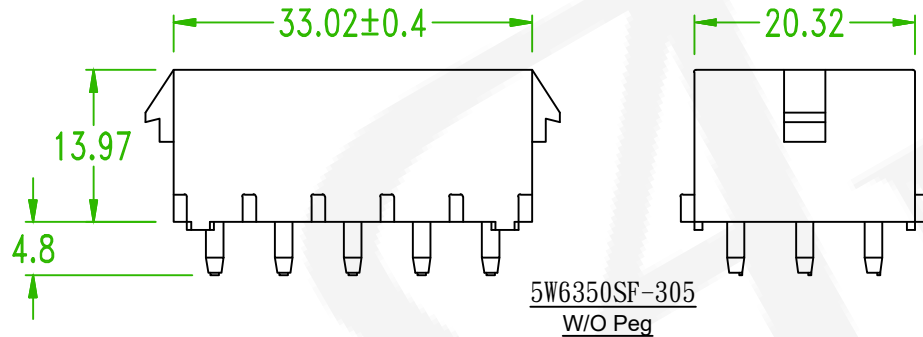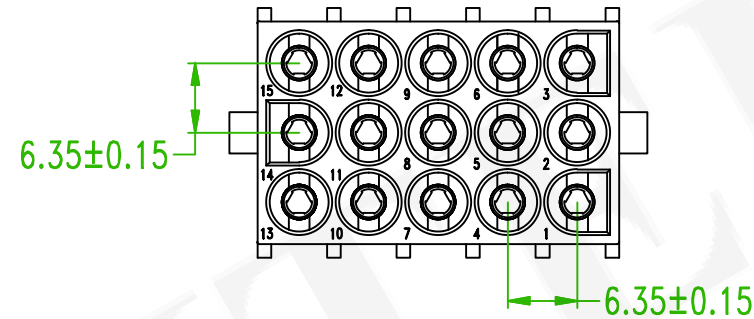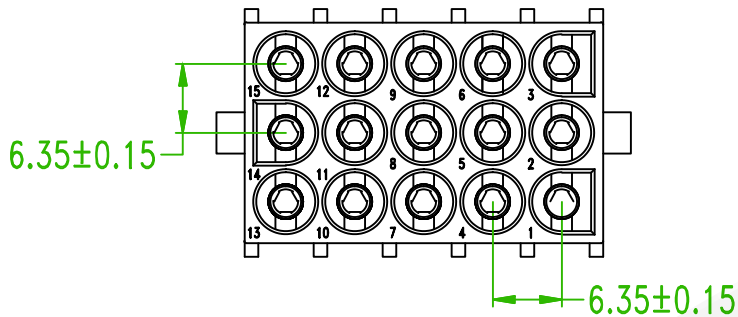

P. C. board layout

Old Part No.:6350S-F3XXTWX-L



REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
 x7	ECN NO.230210: Revise the Drawing	Rex	2023/03/16
 x2	Add the options	Nick	2019/04/22


耀德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030



品名 TITLE	6.35mm STRAIGHT TRIPE ROW WAFER FEMALE TYPE				頁數 Page	1/2
品號 PART NO.	5W6350SF-3XXXXXXLC0X				繪圖 DRAWN	Jeff 2016/12/13
圖號 DRAWING NO.	GW083-EL318	版本 REV.	C	核對 CHECKED	Johnny 2016/12/13	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/13	
公差 TOLERANCE	.X ±0.40 .XX ±0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		





AMTEK 糧德
2023.03.24
Released DCC

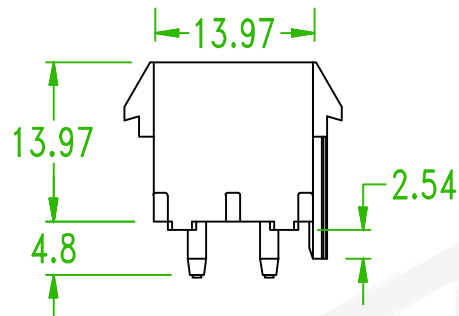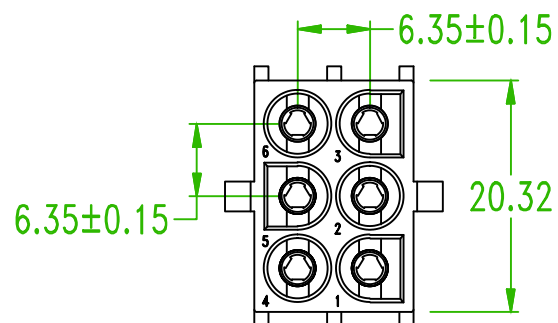


5W6350SF-302

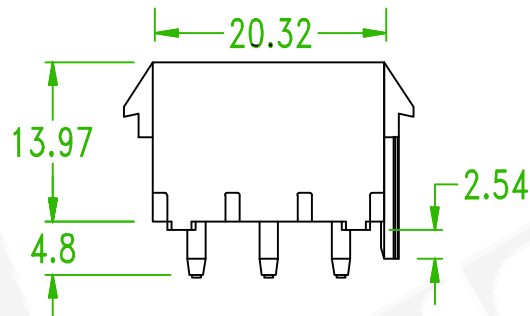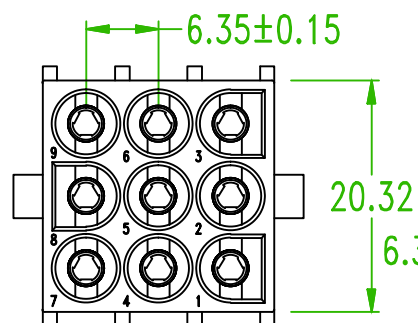


5W6350SF-303

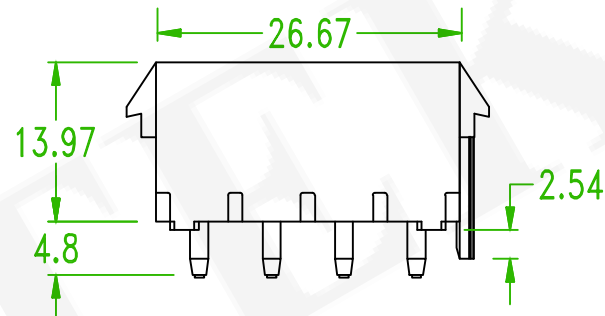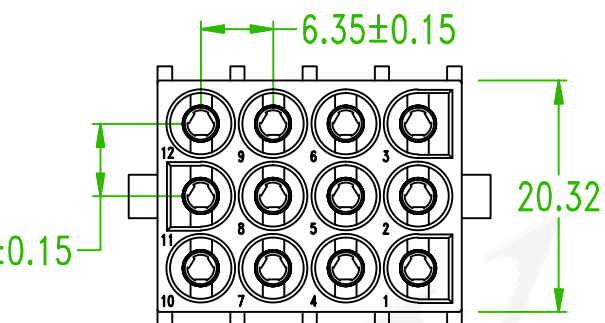


5W6350SF-304

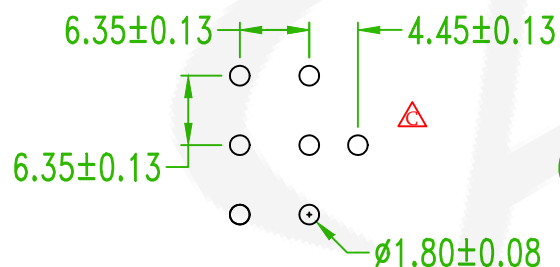

P. C. board layout

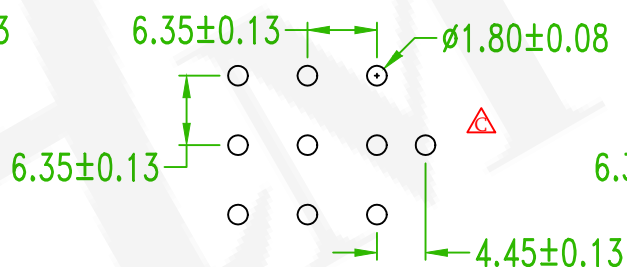

P. C. board layout

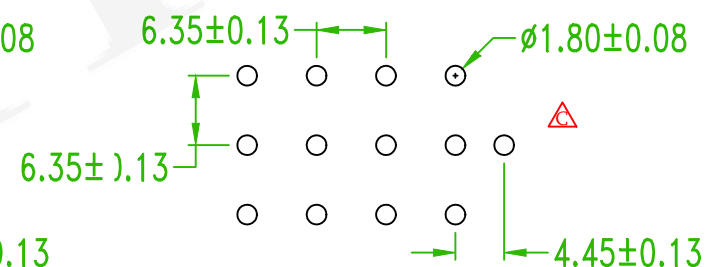

P. C. board layout

Old Part No.:6350S-F3XXTWX-L

△x7	ECN NO.230210: Revise the Drawing	Rex	2023/03/16
△x2	Add the options	Nick	2019/04/22
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	6.35mm STRAIGHT TRIPE ROW WAFER FEMALE TYPE				頁數 Page	2/2
品號 PART NO.	5W6350SF-3XXXXXXLC0X		繪圖 DRAWN	Jeff		
圖號 DRAWING NO.	GW083-EL318	版本 REV.	C	核對 CHECKED	Johnny	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron	
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		