

SPECIFICATION

Current Rate:1 AMP

Insulation Resistance:1000M Ω Min.

Contact Resistance:10m Ω Max.

Dielectric voltage:600V AC for one minute



Operation Temperature:-25°C to +85°C

MATERIAL


Insulator:Polyester,UL 94V-0◎Standard:NY-6T

Contact Pin:Brass







ORDER INFORMATION

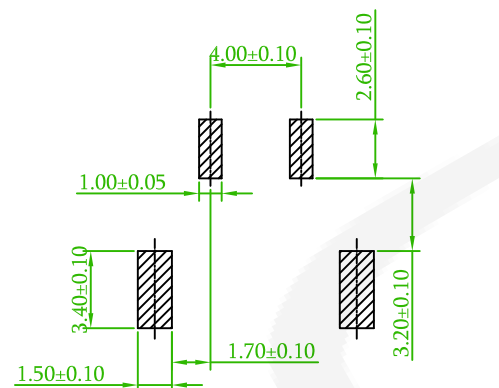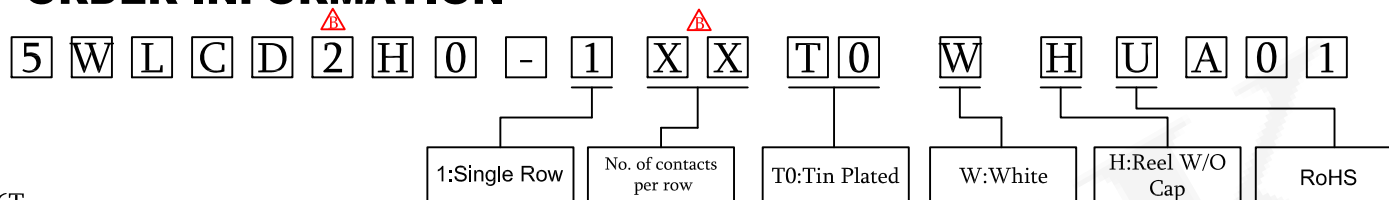

P.C.B LAYOUT

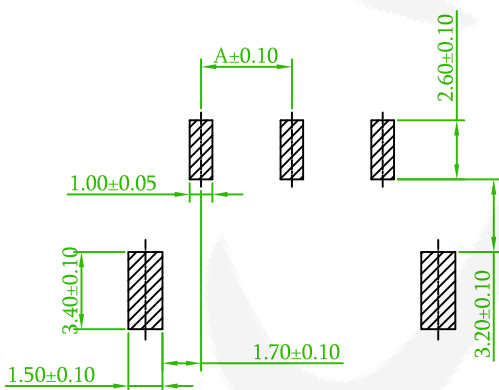

P.C.B LAYOUT

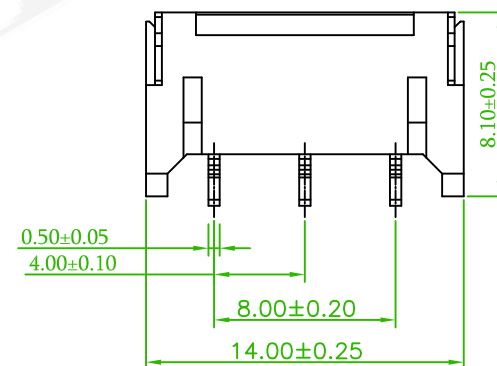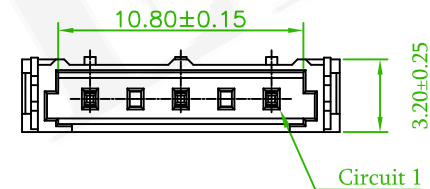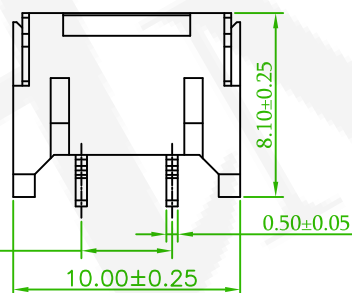

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x2	ECN NO.: 190917 Revise the part no.	Benson	2019/12/27

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	LCD CONN. SMT R/A				頁數 Page	1/1
	品號 PART NO.	5WLCD2H0-1XXT0WHUA01				繪圖 DRAWN	Volvo 2007/10/17
	圖號 DRAWING NO.	GW090-BS612	版本 REV.	B	核對 CHECKED	Paul 2007/10/17	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	James 2007/10/17	
	公差 TOLERANCE	.X ± 0.25 .XX ± 0.20	.X° ± 1°	單位 UNIT	mm	THIRD ANGLE PROJECTION	