

SPECIFICATIONS

Impedance: 50Ω

Frequency Range: DC~6GHz

V.S.W.R: 1.3 MAX

Working Voltage: AC 335V

Dielectric Withstanding Voltage: AC 500V 1 Min

Insulation Resistance: $\geq 1,000M\Omega$

Contact Resistance: Center Contact $\leq 5.0m\Omega$

Outer Contact $\leq 2.5m\Omega$

Temperture Range: -65℃~165℃

ORDER INFORMATION

6 2 M C X R 0 1 - F 5 G 0 W B 0 1


R:PCB90°

F:Female



5:50Ω

G0:Gold Flash

W:White

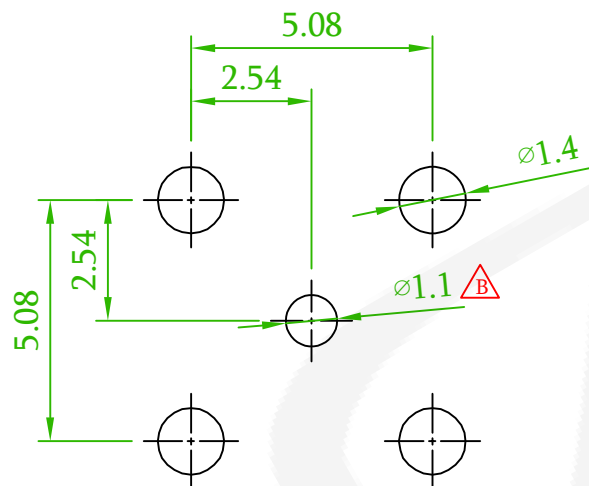

Recommended PCB Layout
(PCB TOLERANCE ± 0.1)

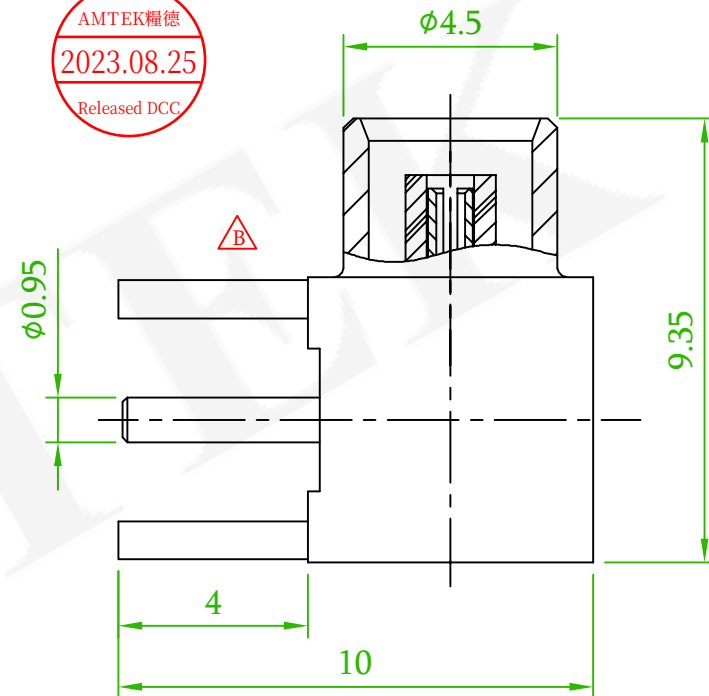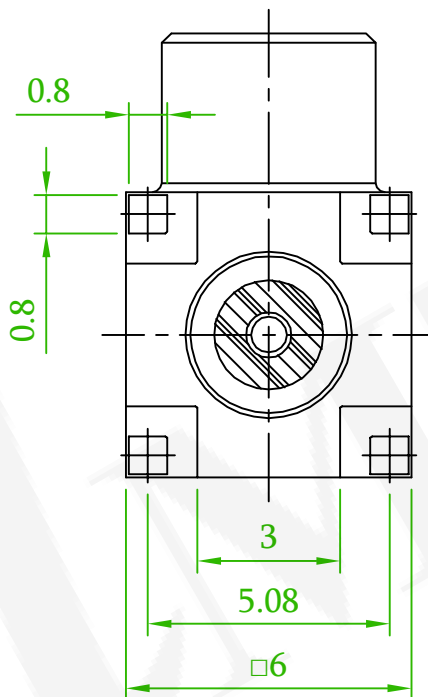

Old Part No. : MCX006-F5GWG-L

06	PRESS WASHER	BRASS	1	GOLD
05	INSULATOR	TEFLON	1	
04	BODY	BRASS	1	GOLD
03	INSULATOR	TEFLON	1	
02	PRESS WASHER	BRASS	1	GOLD
01	CENTER PIN	BERYLLIUM COPPER	1	GOLD
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH



EasyFlow202308240006: Add electrical information

Alice

2023/08/25



ECN NO.: 181203, revise the drawing, BOM, PCB Layout.

Gary

2018/12/19

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	MCX.JACK FOR P.C.B MOUNT . RIGHT ANGLE				頁數 Page	1/1
品號 PART NO.	62MCXR01-F5G0WB01				繪圖 DRAWN	Sam 2009/04/06
圖號 DRAWING NO.	GW141-MC666	版本 REV.	C	核對 CHECKED	Josh 2018/12/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/25	
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION		