

SPECIFICATIONS

Current Rating: 50mA 12VDC
 Insulation Resistance: 100MΩ Min.
 Dielectric Voltage: 250V AC
 Contact Resistance: 30mΩ Max.
 Operation Temperature: -20°C to +70°C

ORDER INFORMATION

6 4 S W T - B B 4 B 2 X X


B: Tact switch

B: SMT T/R



No. of Contact

B: Black

Drive Force:
 16: 260gf±30 gf
 20: 160gf±30 gf

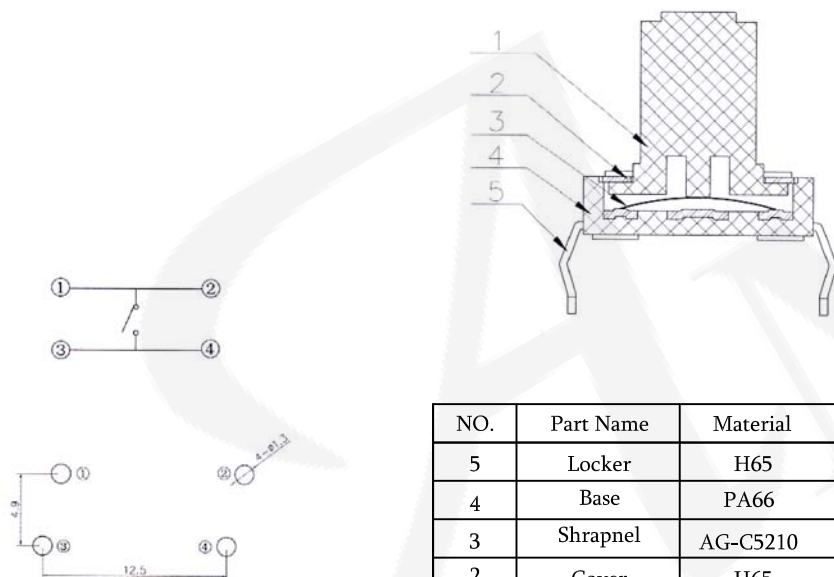

NO.	Part Name	Material	Qty
5	Locker	H65	2
4	Base	PA66	1
3	Shrapnel	AG-C5210	1
2	Cover	H65	1
1	Button	PA66	1

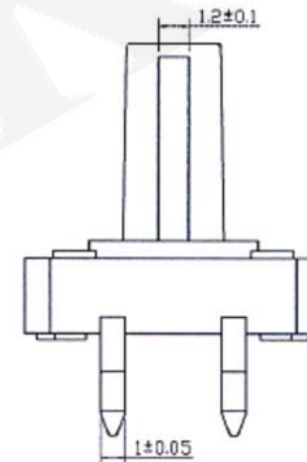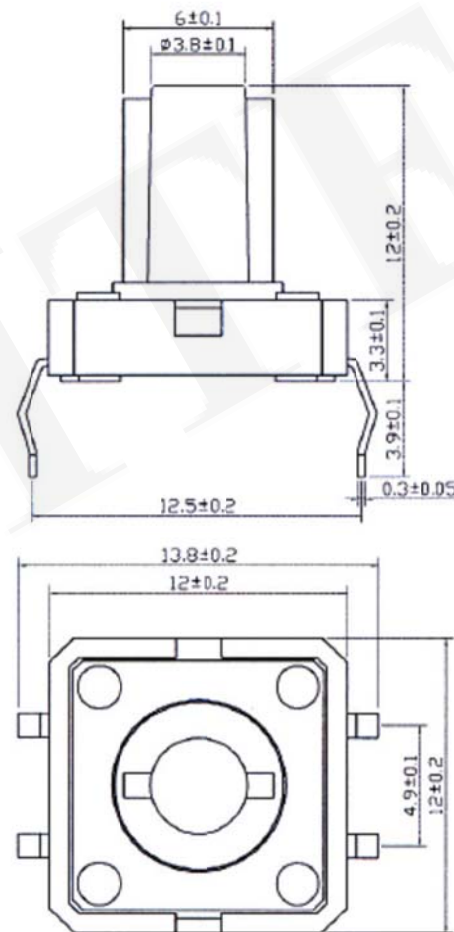

Recommended P.C.B Layout
 (PCB Tolerances±0.1)



REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Tact Switch				頁數 Page	1/1
	品號 PART NO.	64SWT-BB4B2XX				繪圖 DRAWN	Andy 2017/12/14
	圖號 DRAWING NO.	GN026-AA347	版本 REV.	A	核對 CHECKED	Josh 2017/12/14	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/12/14	
	公差 TOLERANCE	±0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION		