

SPECIFICATION

Contact Resistance: 100mΩ Max.
Current Range: 50mA, 12 VDC
Insulation Resistance: 100M Ω Min.
Dielectric Voltage : 250V AC for 1 minute.
Operation Temperature: -20°C to +70°C

MATERIAL

1. Button: PA66
2. Shell: H65
3. Shrapnel: AgSUS-301
4. Base: PA66
5. Peg: H65

ORDER INFORMATION

6 4 S W T - B C 4 B 0 6 6



B: Tact Switch

C:DIP/Bag

No. of Contacts






B:Black



AMTEK 糧德

2018.11.08

Released DCC

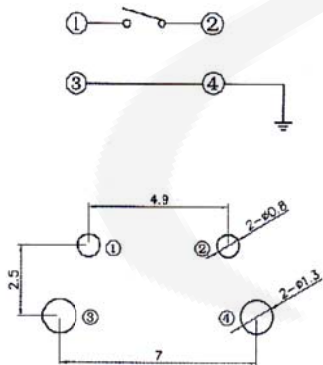

REV.	ECN NO. 180815, revise the annotation: Push Button -> Tact Switch.	Gary	2018/10/26
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	TACT SWITCH				頁數 Page	1/1
	品號 PART NO.	64SWT-BC4B066				繪圖 DRAWN	Sa-Jing 2014/11/18
	圖號 DRAWING NO.	GN026-GB521	版本 REV.	B	核對 CHECKED	Josh 2018/10/26	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/10/26	
	公差 TOLERANCE	± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		