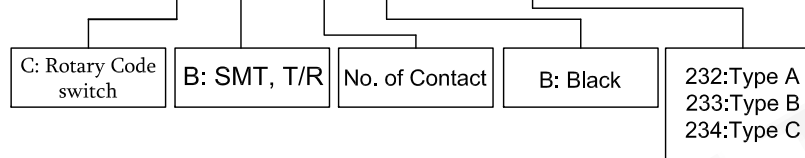


Current Rating: 25mA,24V DC
100mA,50V DC
Insulator Resistance: 100M Ω Min.
Contact Resistance: 100m Ω Max.
Dielectric Voltage: 250V AC for one minute
Operating temperature: -25°C ~ +80°C



6 4 S W T - C B 6 B X X X

A red circular stamp with the text "Amtek" at the top, "2018.02.21" in the middle, and "文管中心" at the bottom.



Insulator: Hi-Temp. Thermoplastic,UL94V-0,Black

		CODE				
			1	2	4	8
TYPE	POSITION					
10 STEP	0	●	●	●	●	●
	1	○	○	○	○	○
	2	●	○	○	○	○
	3	○	○	○	○	○
	4	●	●	○	○	○
	5	○	○	○	○	○
	6	○	○	○	○	○
	7	○	○	○	○	●
	8	●	●	○	○	○
18 STEP	9	○	●	○	○	○
	A	●	○	○	○	○
	B	○	○	○	○	○
	C	●	○	○	○	○
	D	○	●	○	○	○
	E	●	○	○	○	○
	F	○	○	○	○	○



CIRCUIT CHART

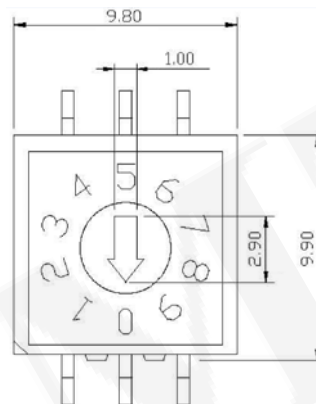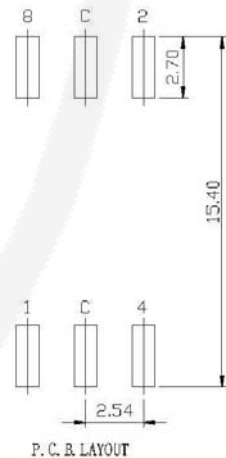

Type A

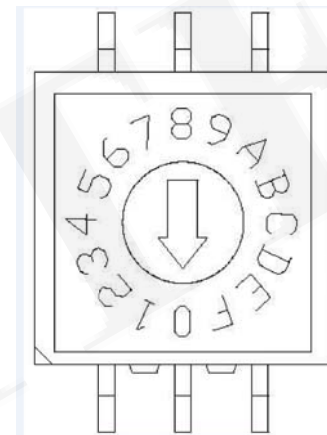

Type B



Type C

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	ROTARY CODE SWITCH				頁數 Page	1/1
品號 PART NO.	64SWT-CB6BXXX			繪圖 DRAWN	Andy 2018/02/14	
圖號 DRAWING NO.	GW173-AA426	版本 REV.	A	核對 CHECKED	Josh 2018/02/14	
客戶品號 CUSTOMER P/N		比例 SCALE	1 : 1	承認 APPROVED	Jason 2018/02/14	
公差 TOLERANCE	± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		