

SPECIFICATIONS

Current Rating: 25mA,24V DC

100mA,50V DC

Insulator Resistance: 100MΩ Min.

Contact Resistance: 100mΩ Max.

Dielectric Voltage: 250V AC for one minute

Operating temperature: -25°C ~ +80°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic,UL94V-0,Black

ORDER INFORMATION

6 4 S W T - C D 6 B X X X

C: Rotary Code
switch

D: DIP, Tube

No. of Contact


B: Black

235:Type A
236:Type B
237:Type C




○ REAL CODE		● COMPLEMENTARY CODE				
TYPE	POSITION	CODE				8
	00R 16C	1	2	4		
10 R	0	F	●	●	●	●
	1	E	○	●	●	●
	2	D	●	○	●	●
	3	C	○	○	●	●
	4	B	●	●	○	●
	5	A	○	●	○	●
	6	9	●	○	○	●
	7	8	○	○	○	●
	8	7	●	○	●	○
	9	6	○	●	●	○
16 R.C	A	5	●	○	●	○
	B	4	○	○	●	○
	C	3	●	●	○	○
	D	2	○	●	○	○
	E	1	●	○	○	○
	F	0	○	○	○	○


CIRCUIT CHART

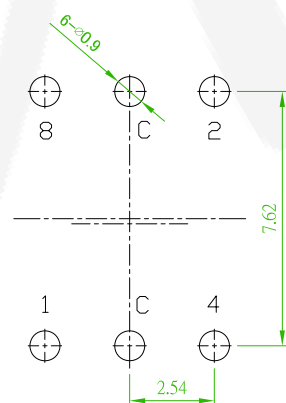


P. C. B. LAYOUT





Type B



Type C

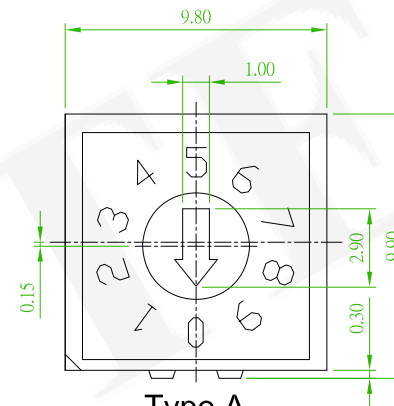

Type A

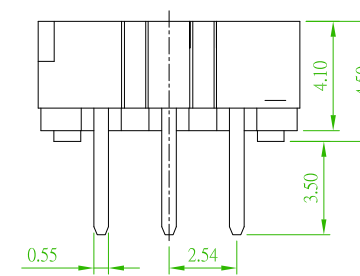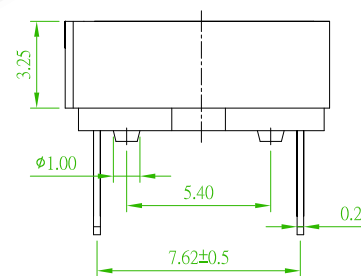

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	ROTARY CODE SWITCH				頁數 Page	1/1
	品號 PART NO.	64SWT-CD6BXXX				繪圖 DRAWN	Andy
	圖號 DRAWING NO.	GW173-AA427	版本 REV.	A	核對 CHECKED	2018/02/14	
	客戶品號 CUSTOMER P/N		比例 SCALE	1 : 1	承認 APPROVED	2018/02/14	
	公差 TOLERANCE	± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION		