

SPECIFICATIONS

Current Rating: 25mA,24V DC

100mA,50V DC

Insulator Resistance: 100MΩ Min.

Contact Resistance: 100mΩ Max.

Dielectric Voltage: 250V AC for one minute

Operating temperature: -25°C ~ +80°C

MATERIAL

Insulator: Hi-Temp. Thermoplastic,UL94V-0,Black

ORDER INFORMATION

6 4 S W T - C D 6 B X X X

C: Rotary Code
switch

D: DIP, Tube

No. of Contact

B: Black


238:Type A
239:Type B
240:Type C




AMTEK 耀德
2022.04.11
Released DCC

TYPE	POSITION	CODE			
		1	2	4	8
10 STEP	0	●	●	●	●
	1	○	●	●	●
	2	●	○	●	●
	3	○	○	●	●
	4	●	●	○	●
	5	○	●	○	●
	6	●	○	○	●
	7	○	○	○	●
	8	●	●	●	○
	9	○	●	●	○
16 STEP	A	●	○	●	○
	B	○	○	●	○
	C	●	●	○	○
	D	○	●	○	○
	E	●	○	○	○
	F	○	○	○	○


△ CIRCUIT CHART




P.C.B. LAYOUT





Type A



Type B

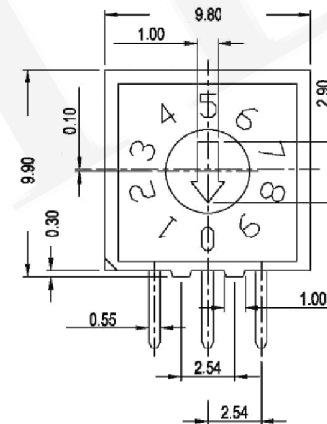

Type C

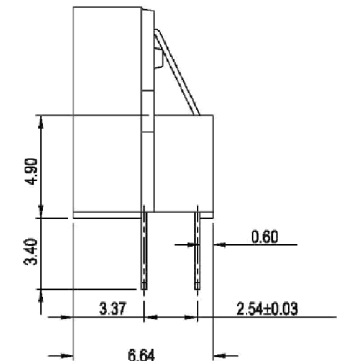

品名 TITLE	ROTARY CODE SWITCH				頁數 Page	1/1
品號 PART NO.	64SWT-CD6BXXX				繪圖 DRAWN	Andy
圖號 DRAWING NO.	GW173-AA428	版本 REV.	B	核對 CHECKED	2018/02/14	
客戶品號 CUSTOMER P/N		比例 SCALE	1:1	承認 APPROVED	Jason	
公差 TOLERANCE	± 0.20	單位 UNIT	mm	THIRD ANGLE PROJECTION	2018/02/14	

△x1

Add the circuit chart

Alice

2022/04/11

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE