



SPECIFICATIONS


Current Rating: 0.3A 50V DC
 Contact Resistance: 100mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -16°C to +60°C
 Drive Force :250gf ± 100gf

ORDER INFORMATION




6 4 S W T - P C 6 B 2 7 7



SCHEMATIC (NON-SHORTING)



Recommended PCB Layout
(PCB TOLERANCE ±0.1)

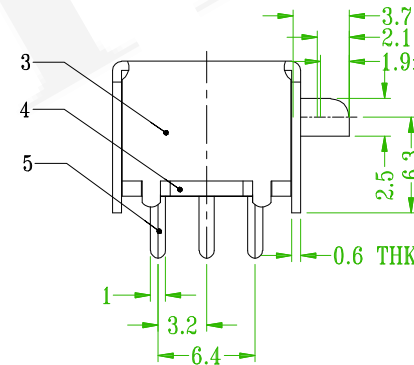

NO.	PARTS	MATERIALS	Q'TY	FINISH
6	CONTACT CLIP	PBS STRIP	2	Ag PLATED
5	TERMINAL	BRASS STRIP	6	Ag PLATED
4	BASE	PHENOLIC RESIN	1	NATURAL
3	FRAME	STEEL STRIP	1	Ni PLATED
2	SPRING	STEEL WIRE	1	Ni PLATED
1	KNOB	POM	1	BLACK

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Push Button Switch			頁數 Page	1/1
	品號 PART NO.	64SWT-PC6B277			繪圖 DRAWN	Roy 2018/05/30
	圖號 DRAWING NO.	GN167-RR546	版本 REV.	B	核對 CHECKED	Josh 2018/10/15
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/10/15
	公差 TOLERANCE	< 1.5mm ± 0.1 > 1.5mm ± 0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
x1	ECN NO.: 180816, revise the color: N: Natural -> B: Black.	Gary	2018/10/15