

NOTES:

1. Rating:

CQC 6A250VAC 6(8)A 250VAC

8A/128 50VAC T105/55

UL CUL 10GPA 125V AC

6GPA 250VAC T105/55

VDE ENEC 6(4)A 250VAC T85/55

KC 6(4)A 250V AC T85/55

2. Circuit Diagram: 3P ON-OFF

3. Terminal Strength: ≥80N

4. Electrical life: ≥10000 cycles

5. Withstand Voltage: Withstand Voltage: 1500VAC 1min

Terminals to Button: 3000VAC 1min

Leakage Current: 1mA


6. Current resistance : ≤50mΩ(initial)

7. Insulation resistance: ≥100MΩ



8. Body Material: NYLON 66 94V-0~2

ORDER INFORMATION

6 4 S W T - R C 3 B 2 X X







SWITCHING CIRCUIT

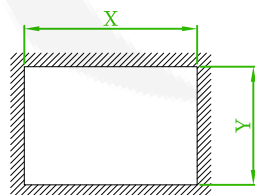

PANEL CUT-OUT

PANEL CUT-OUT

Z	Y	X
0.70~1.25	12.90~13.10	18.9~19.1
1.25~2.00	12.90~13.10	19.1~19.2
2.00~3.00	12.90~13.10	19.3~19.4

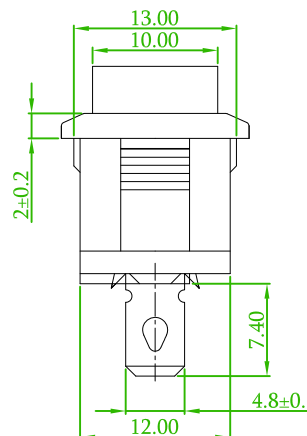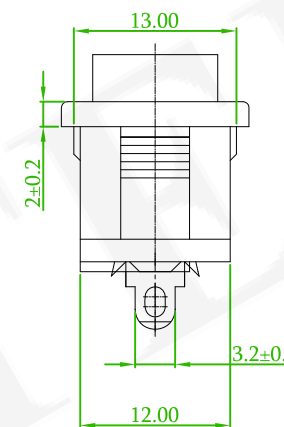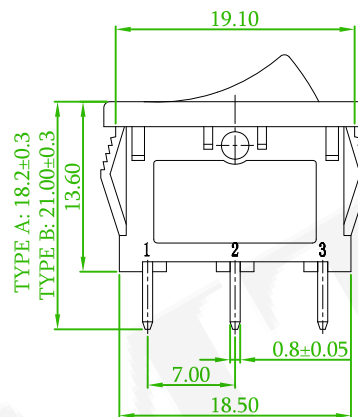

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	ROCKER SWITCH				頁數 Page	1/1
	品號 PART NO.	64SWT-RC3B2XX				繪圖 DRAWN	Andy 2018/02/12
	圖號 DRAWING NO.	GN151-AA419	版本 REV.	A	核對 CHECKED	Josh 2018/02/12	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/02/12	
	公差 TOLERANCE	±0.3	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE