

SPECIFICATIONS

Current Rating: 0.3A 12V DC

Contact Resistance: 100mΩ Max.

Insulation Resistance: 100MΩ Min.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -16°C to +60°C

Drive Force: 200gf ± 80gf

ORDER INFORMATION

6 4 S W T - S E 3 B 2 X X


S: Slide Switch

E:SMT/Bag


No. of Contacts

B:Black



66: a=2mm
88: a=3mm
89: a=4mm



SCHEMATIC

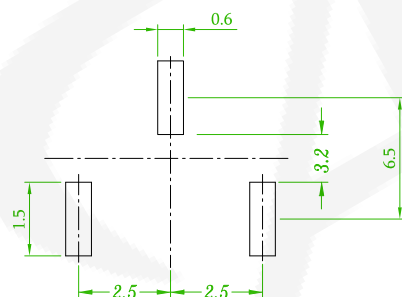

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

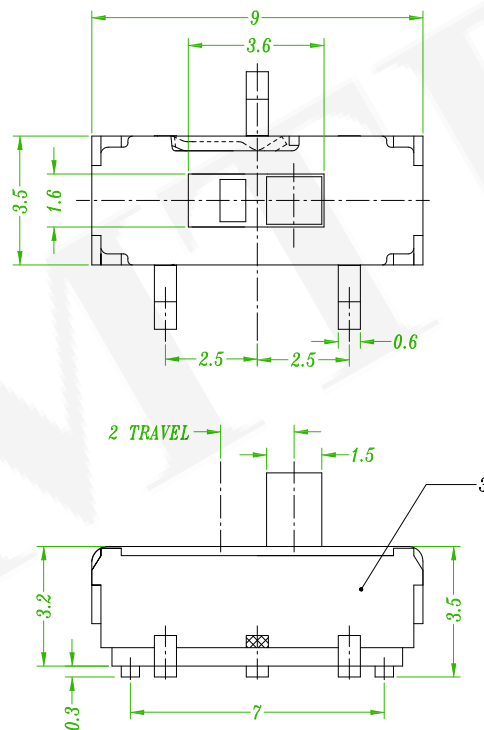

4	MK22D10 CONTACT/SPRING	BERYLLIUM/PBS	1	Ag PLATED/NATURAL
3	MS12D17 CASE	PA6T/0.3mm BRASS STRIP	1	BLACK/Ag(Ni) PLATED
2	MS22D16 COVER	0.2mm SUS	1	WASHING
1	MS22D16 KNOB	PA6T	1	BLACK
NO.	PART NAME	MATERIAL	QTY	FINISHING

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	SLIDE SWITCH				頁數 Page	1/1
	品號 PART NO.	△B 64SWT-SE3B2XX				繪圖 DRAWN	Roy 2018/05/30
	圖號 DRAWING NO.	GN167-RR535	版本 REV.	B	核對 CHECKED	Jason 2018/10/12	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/10/12	
	公差 TOLERANCE	< 1.5mm ± 0.1 > 1.5mm ± 0.2	單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△Bx2	ECN NO.: 180817, revise the p/n: 64SWT-ME3B2XX -> 64SWT-SE3B2XX.	Gary	2018/10/12