

ORDER INFORMATION

SPECIFICATIONS

Current Rating: 3 AMP
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Dielectric Voltage: 1000V AC/DC
 Operation Temperature: -40°C to +105°C

MATERIAL

Contact Pin: Brass
 Insulator: PBT, UL94V-0



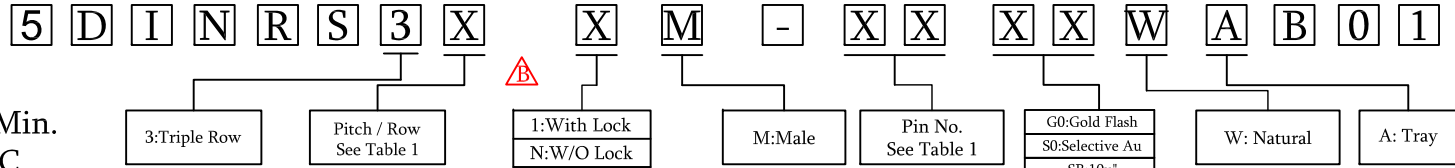


Table 1

Part No.	Pin No.	Pitch	Rows with Pins	Contact Arrange
5DINRS3AXM-48 ***	48	2.54	A B C	
5DINRS3BXM-32 ***	32		A B -	
5DINRS3CXM-32 ***	32		A - C	
5DINRS3DXM-16 ***	16		A - -	
5DINRS3EXM-24 ***	24	5.08	A B C	
5DINRS3FXM-16 ***	16		A B -	
5DINRS3GXM-16 ***	16		A - C	
5DINRS3HXM-08 ***	8		A - -	

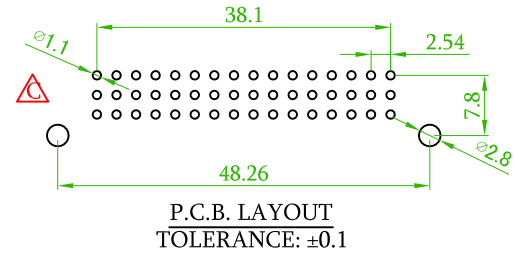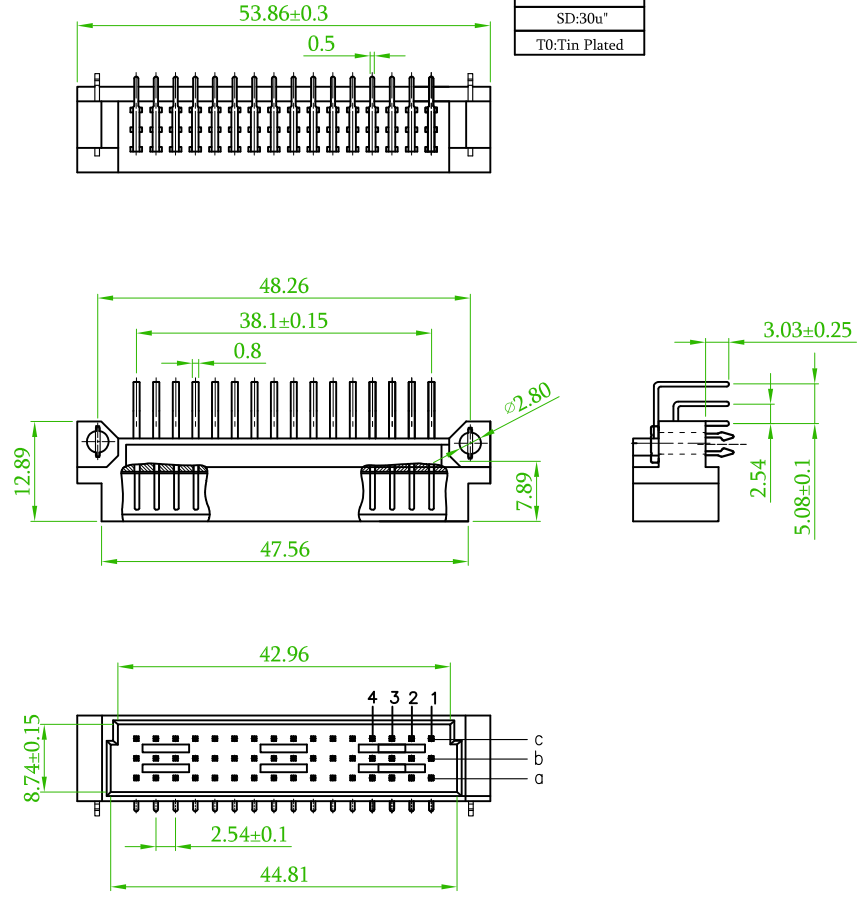

Old Part No.:DINRS-M31XXXWX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	Revise the Table 1	Roy	2018/05/10
△x3	Add B, F Type, P.C.B. Layout.	Gary	2017/09/22
△x3	Revise the P/N:5DINRS3A1M-XXXXWAB01->5DINRS3XXM-XXXXWAB01	Roy	2016/08/18

Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	DIN 41612 3-R R/A DIP TYPE				頁數 Page
品號 PART NO.	△ 5DINRS3XXM-XXXXWAB01				1/1
圖號 DRAWING NO.	GN087-GA644	版本 REV.	D	繪圖 CHECKED	Jeff 2015/09/16
客戶品號 CUSTOMER P/N		比例 SCALE	None	核對 APPROVED	Josh 2018/05/10
公差 TOLERANCE	.X ±0.30 .XX ±0.20	單位 UNIT	mm	承認 THIRD ANGLE PROJECTION	Jason 2018/05/10