ORDER INFORMATION

SPECIFICATION

Current Rating: 2 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0
Contact Pin:Copper Alloy

5	P	S	2	S	D	A	6	3	-	3	X	X	X	X	N	N	N	T	U	-	0	0

- 3: 3:Triple Row
- XX: No. of Pin Per Row(02~40)
- XX: ◎G0:Gold Flash / S0:Selective; GA:5u" / SA:5u"; GB:10u" / SB:10u"; GC:20u" / SC:20u"; GD:30u" / SD:30u"; T0:Tin Plated; TE:Tin 200u"
- N: N:W/O Peg
- N: N:W/O Bump
- N: N:Non Type
- T: ◎T:Tube, W/O Cap
- U: RoHS

certified Pb RoHS Compliant

Amtek 2017.12.19 文管中心

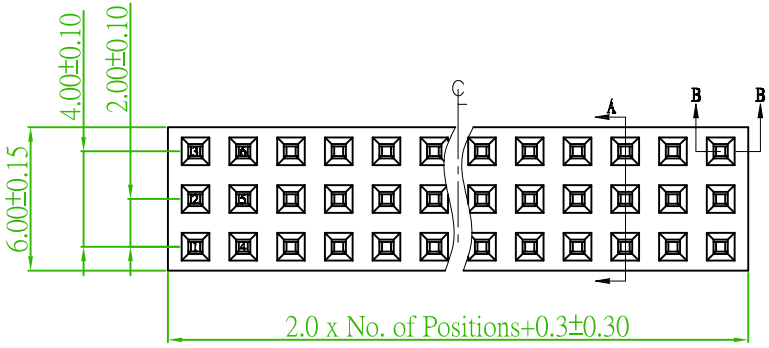

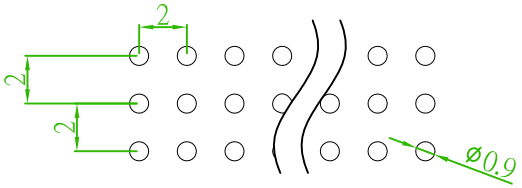

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

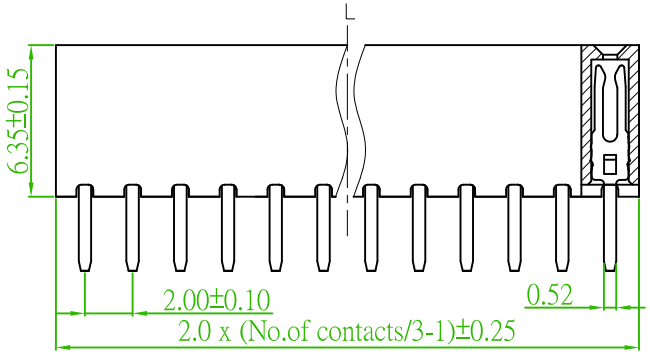

SECTION B-B



SECTION A-A

Old Part No. : PS2S63-3XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B	Revised the Drawing	B	2016/12/06 Jeff

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.0mm			頁數 Page	1/1
品號 PART NO.	5PS2SDA63-3XXXXNNNTU-00			繪圖 DRAWN	Jeff 2015/08/26
圖號 DRAWING NO.		版本 REV.	B	核對 CHECKED	John 2015/08/26
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/26
公差 TOLERANCE	.X ± 0.25 .XX ± 0.20 .X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	