SPECIFICATION

Current Rating :3 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -25 ˚C to +85 ˚C

MATERIAL

Insulator: P.B.T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 P H 1 S D A 7 4 - 2 X X X X N N X L - A B 000 - 0 0

2:Dual Row	No. of contacts Per Row(02~40)	G0:Gold Flash	S0:Selective Au
		GA:Au 5u"	SA:Selective Au 5u"
		GB:Au 10u"	SB:Selective Au 10u"
		GC:Au 20u"	SC:Selective Au 20u"
		GD:Au 30u"	SD:Selective Au 30u"
		T0:Tin Plated	TE:Tin 200u"

N:W/O Peg
N:Non Type
L:RoHS+P.B.T
X:Box B:Bag
C:Tube With Cap
EX:060030000 A:6.0 B:3.0

certified Pb RoHS Compliant

Amtek 2018.02.12 文管中心

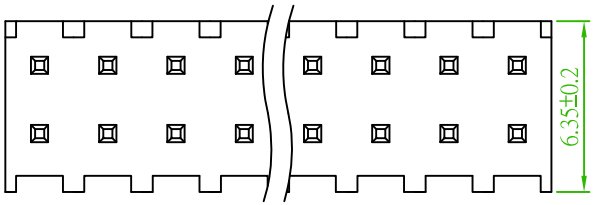

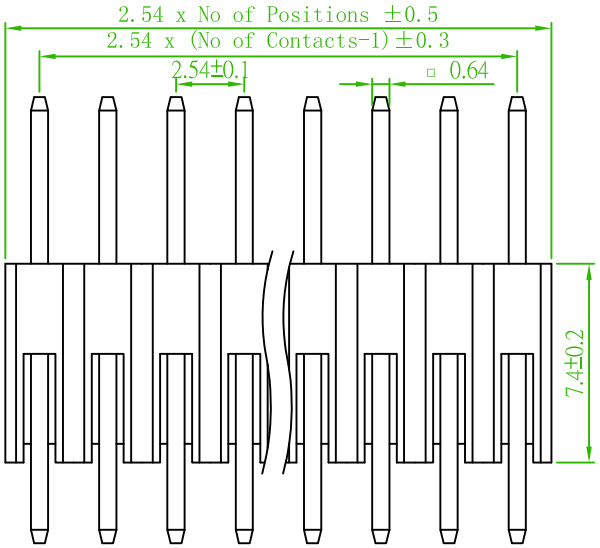

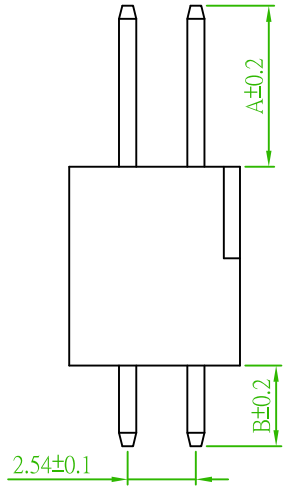

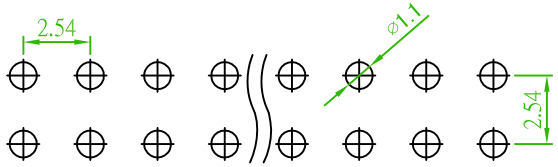

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No. :PH1S74-2XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B	Modify order information	B	2017/01/26 Gary

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	PIN HEADER 2.54mm S/R V/T DIP TYPE			頁數 Page	1/1
品號 PART NO.	5PH1SDA74-2XXXXNNXL -XXXXXX000-00			繪圖 DRAWN	Mia 2015/08/24
圖號 DRAWING NO.	GN016-GA182	版本 REV.	B	核對 CHECKED	John 2015/08/24
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/08/24
公差 TOLERANCE	.X ± 0.35 .XX ± 0.25 .X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	