ORDER INFORMATION

SPECIFICATIONS

Current Rating: 3 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black
Contact Pin:Copper Alloy

5	P	S	1	S	D	A	3	5	-	1	X	X	X	X	N	N	N	X	U	-	0	0

- 1: 1:Single Row
- 2: No. of Pin Per Row(02~40)
- 3: ◎G0:Gold Flash S0:Selective; GA:5u" SA:5u"; GB:10u" SB:10u"; GC:20u" SC:20u"; GD:30u" SD:30u"; T0:Tin Plated; TE:Tin 200u"
- 4: N:W/O Bump
- 5: N:W/O Peg
- 6: N:Non Type
- 7: X:Box B:Bag; R:T/R with cap H:T/R W/O cap; C:Tube with cap T:Tube W/O cap
- 8: U:RoHS+Hi Temp

certified Pb RoHS Compliant

Amtek 2018.02.21 文管中心

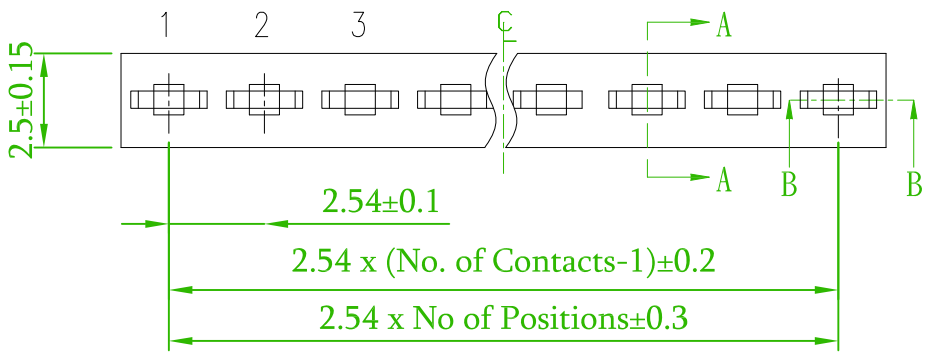

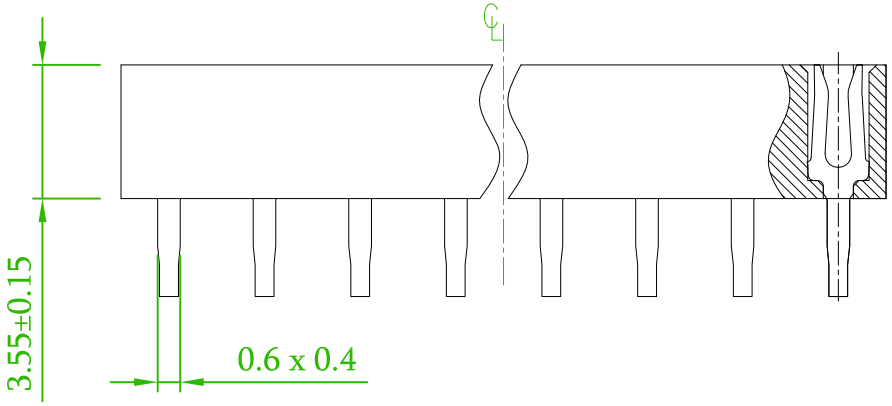

SECTION:B-B



SECTION:A-A

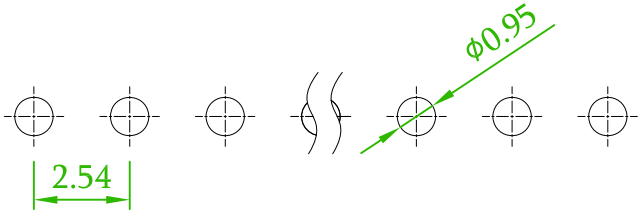

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

Old Part No. :PS1S35-1XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm S/R V/T DIP TYPE			頁數 Page	1/1
品號 PART NO.	5PS1SDA35-1XXXXNNNXU-00			繪圖 DRAWN	Joey 2016/09/01
圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Jonny 2016/09/01
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/09/01
公差 TOLERANCE	.X ± 0.40 .XX ± 0.25 .X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	