SPECIFICATION

Current Rating: 3 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40˚C to +105˚C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
Contact Pin: Copper Alloy

ORDER INFORMATION

5	P	S	1	S	D	B	6	8	-	1	X	X	X	X	N	N	N	T	U	-	0	0

- 1: 1:Single Row
- XX: No. of Pin Per Row(02~40)
- XX:

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	

- N: N:W/O Peg / N:W/O Bump
- N: N:W/O Peg / N:W/O Bump
- N: N:N Type
- T: T:Tube
- U: RoHS
- 00

certified Pb RoHS Compliant

AMTEK糧德
2019.01.25
Released DCC

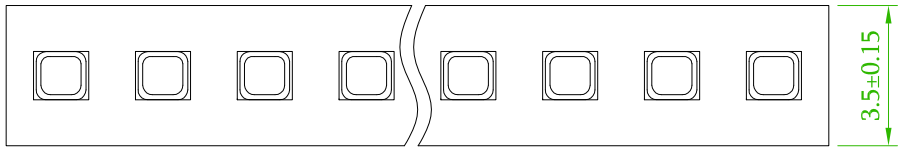

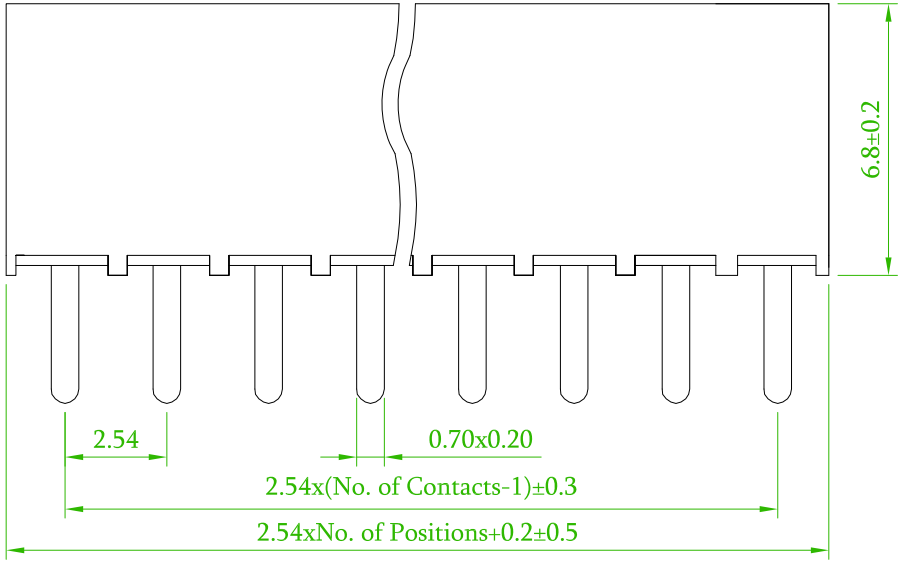

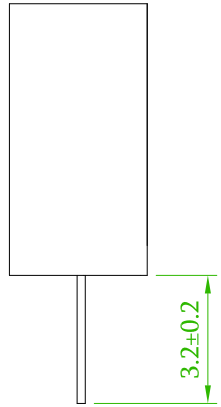

Old P/N: PS1S68-1XX

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 2.54mm S/R V/T DIP TYPE			頁數 Page	1/1
品號 PART NO.	5PS1SDB68-1XXXXNNNTU-00			繪圖 DRAWN	Gary 2019/01/25
圖號 DRAWING NO.	GN110-EA600	版本 REV.	A	核對 CHECKED	Josh 2019/01/25
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/25
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25 .X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	