SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 125V AC, DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Dielectric Voltage: 800V AC for one minute

MATERIAL

Contact Pin: Brass
Insulator: Nylon 66, UL94V-0

ORDER INFORMATION

5 W 2 0 0 2 S 0 - 1 X X T 0 W X L A 0 1

- 1: 1:Single Row
- XX: No. of Contacts per Row
- T0: T0:Tin Plated
- W (B): W:Natural
- X (C): T:Tube / B:Bag
- LA01: RoHS

certified Pb RoHS Compliant

AMTEK糧德
2018.10.05
Released DCC

No. of Contacts	Dimensions(mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

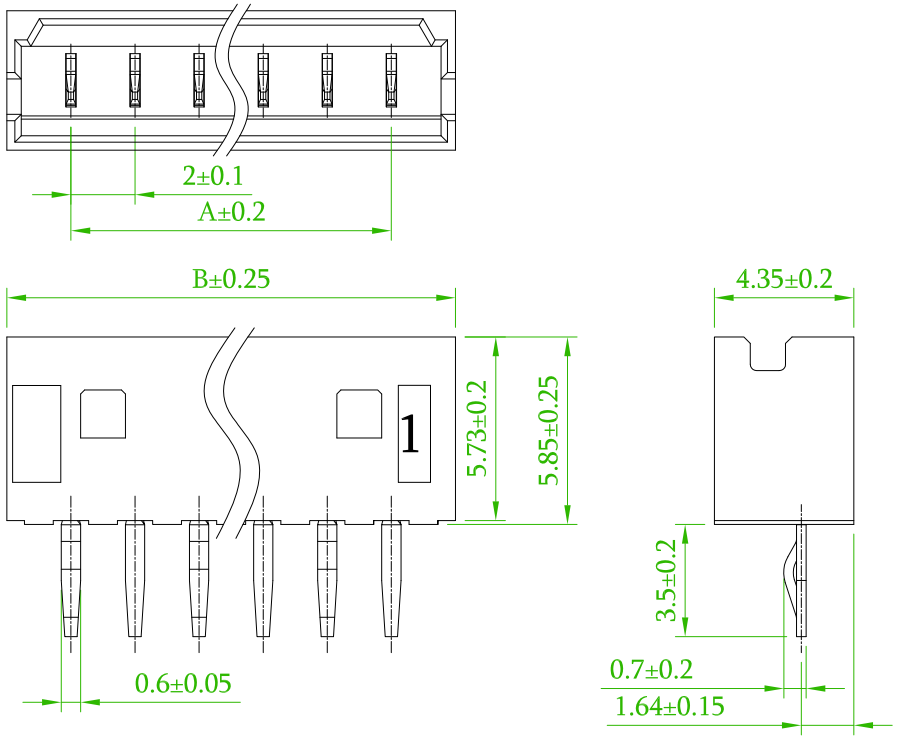



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Old Part No.:2002S-XXTW-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
C x1	Add a package: B: Bag.	Gary	2018/10/05
B x1	ECN No.:170908, revised the color.	Kilin	2017/09/07

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	2.0mm WAFER S/R V/T DIP TYPE			頁數 Page	1/1
品號 PART NO.	5W2002S0-1XXT0WXLA01			繪圖 DRAWN	Kent 2006/07/03
圖號 DRAWING NO.	GW090-EL143	版本 REV.	C	核對 CHECKED	Josh 2018/10/05
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/10/05
公差 TOLERANCE	.X ± 0.25 .XX ± 0.15	單位 UNIT	mm	THIRD ANGLE PROJECTION	