SPECIFICATIONS

Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C to +105°C
Contact Resistance: 10mΩ Max
Withstanding Voltage: 1500V AC/minute
Insulation resistance:1000mΩ Min
After environmental testing:20mΩ Max

MATERIAL

Insulator:Nylaon 66,UL94V-0
Contact:Brass

ORDER INFORMATION

5 W 3 9 6 0 D X - 1 X X X X T B L H 0 1

- 3960: Pitch 3.96mm
- X: A:18 AWG, B:20 AWG, C:22 AWG, D:24 AWG, E:26 AWG
- 1: No. of contacts per row
- XX: T0:Tin Plated, G0:Gold Flash, SA:Selective 5u", SB:Selective 10u", SF:Selective 15u", SD:Selective 30u"
- T: T:Transparent
- B: B:Bag
- LH01: L:RoSH+Nylon66

Amtek
2017.08.29
文管中心

Circuits	DIM.A	DIM.B	Tolerances
02	7.92	3.96	±0.15
03	11.88	7.92	
04	15.84	11.88	
05	19.80	15.84	
06	23.76	19.80	±0.20
07	27.72	23.76	
08	31.68	27.72	
09	35.64	31.68	
10	39.60	35.64	
11	43.56	39.60	±0.25
12	47.52	43.56	
13	51.48	47.52	

Circuits	DIM.A	DIM.B	Tolerances
14	55.44	51.48	±0.25
15	59.40	55.44	
16	63.36	59.40	±0.30
17	67.32	63.36	
18	71.28	67.32	
19	75.24	71.28	
20	79.20	75.24	
21	83.16	79.20	±0.35
22	87.12	83.16	
23	91.08	87.12	
24	95.04	91.08	
25	99.00	95.04	

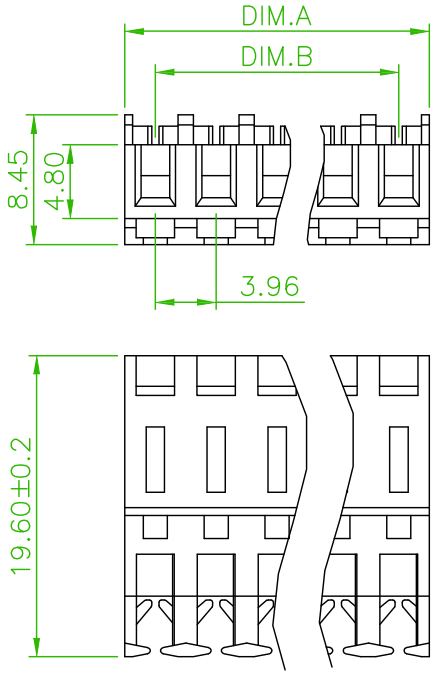

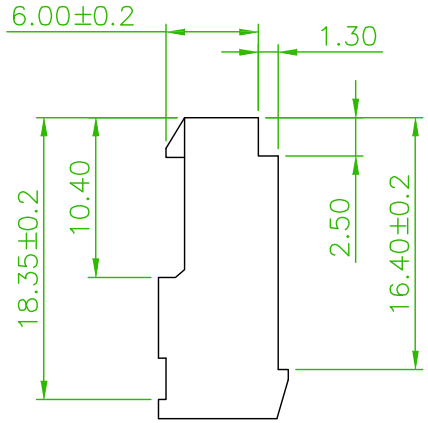

Old Part No.:3960IDC-XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK
糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	3.96mm IDC Housing			頁數 Page	1/1
品號 PART NO.	5W3960DX-1XXXXTBLH01			繪圖 DRAWN	Roy 2016/07/29
圖號 DRAWING NO.		版本 REV.	A	核對 CHECKED	Boris 2016/07/29
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Boris 2016/07/29
公差 TOLERANCE	.X ± 0.20 .XX ± 0.10	單位 UNIT	mm	THIRD ANGLE PROJECTION	