SPECIFICATION

Current Rate:1 AMP
Voltage Rate:250V AC/DC
Insulation Resistance:1000MΩMin
Contact Resistance:20mΩMax
Dielectric voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

MATERIAL

Insulator:PBT+G.F,UL94V-0
Contact Pin:Copper Alloy

ORDER INFORMATION

5 8 I 3 D A B - X X X X A - 1

◎:Standard Recommend

- D: D:IDC Type
- B: B:With Bump,W/O SR
- XX: No. of contacts (See Table)
- XX: G0:Gold Flash / T0:Tin Plated
- A: A:Tray, W/O Cap
- 1: 1:Black Insulator

NUMBER OF POSITIONS	DIMENSION	
	A	B
06	2.54	8.00
08	3.81	9.27
10	5.08	10.54
12	6.35	11.81
14	7.62	13.08
16	8.89	14.35
20	11.43	16.89
24	13.97	19.43
26	15.24	20.70
30	19.05	23.24
34	20.32	25.78
40	24.13	29.59
50	30.48	35.94

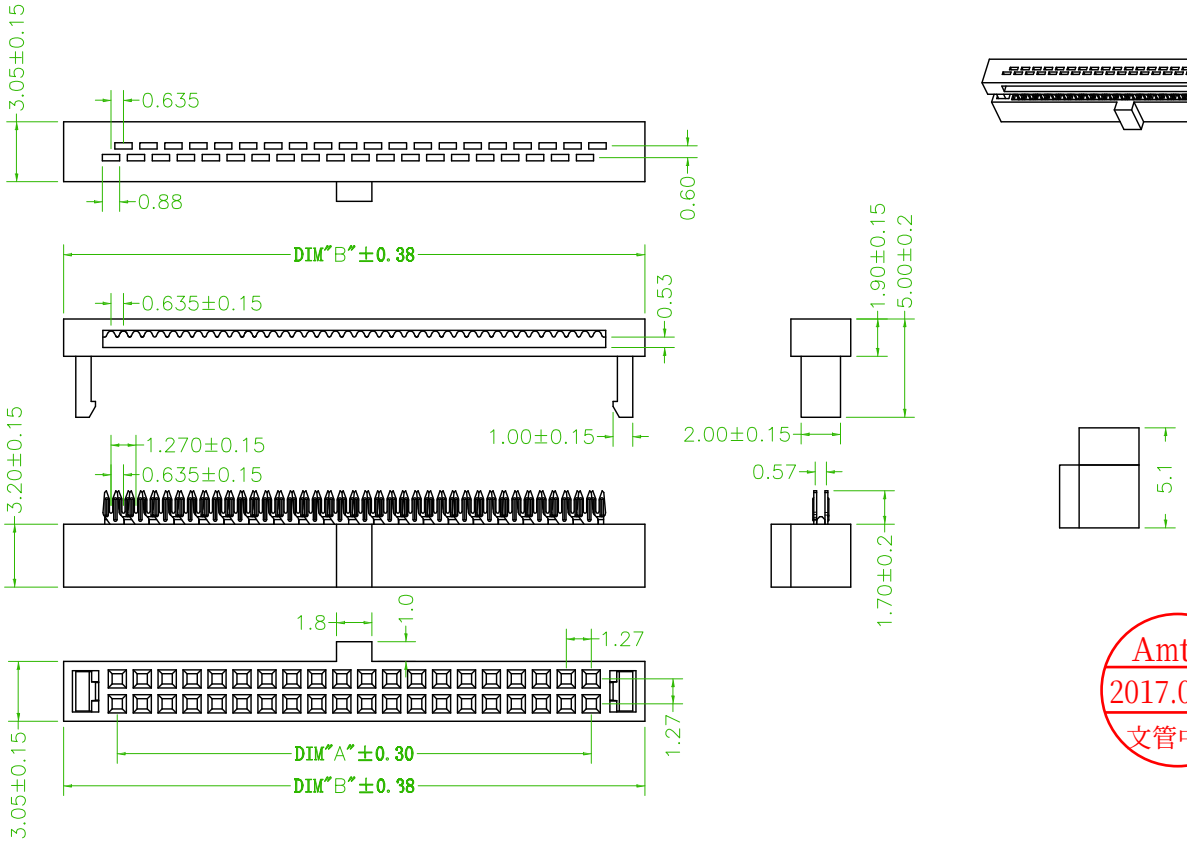

Amtek
2017.08.21
文管中心

Old Part No.:IDC4-XX-L

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B	Revised the Part No.:58I3DBB-XXXXA-1->58I3DAB-XXXXA-1	B	2016/10/13 Jeff

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	IDC Socket 1.27x1.27mm				
品號 PART NO.	58I3DAB-XXXXA-1			繪圖 DRAWN	Roy 2016/06/07
圖號 DRAWING NO.		版本 REV.	B	核對 CHECKED	Emily 2016/06/07
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/06/07
公差 TOLERANCE	.X ± 0.30 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	