Specification:

Contact Resistance: 30m Ohm Max.
Insulation Resistance: 1000M Ohm Min. At 500VDC.
Rated Voltage And Current: 1.5A At 250VAC Minimum.
Dielectric Withstanding Voltage:750V AC (rms) for 1 Minute
Durability (Life Test): 1500 Cycles.
Insertion Force: 35 Newtone Maximum.
Extraction Force: 10 Newtone Minimum.

ORDER INFORMATION

5 U S 2 A 1 9 D F - 2 0 4 S 0 X L A D 1

- 2:USB2.0
- F:Female
- 2:2 Ports
- No. of contacts
- S0: Selective
- B:Black / W:White
- RoHS
- A:Tray W/O Cap

certified Pb RoHS Compliant

Amtek 2017.08.23 文管中心



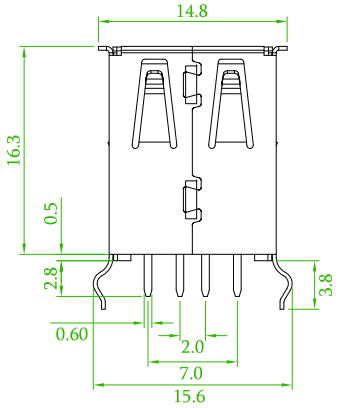

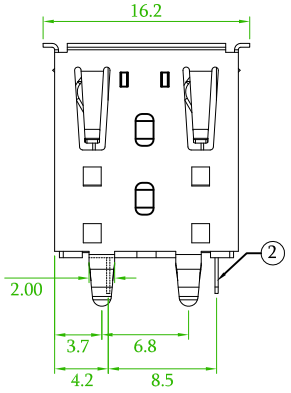





PCB LAYOUT
(BOTTOM VIEW)

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	WHITE/Black	1	
2	PIN TERM.	PHOS. BRONZE,T:0.25	GOLD-TIN PLATED	8	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS,T:0.3	NICKEL PLATED	1	NI:80~120u"
4	SPRING CLIP	BRASS,T:0.3	NICKEL PLATED	1	NI:80~120u"
5	SPEACER	P.E.	NATURAL	2	

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B	Revised the Drawing	B	2016/07/26 Jeff

Old Part No. :USB-002K-A1X-L

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	USB A TYPE FEMALE DUAL PORTS			頁數 Page	1/1
品號 PART NO.	5US2A19DF-204S0XLAD1			繪圖 DRAWN	Mia 2015/10/05
圖號 DRAWING NO.		版本 REV.	B	核對 CHECKED	John 2015/10/05
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2015/10/05
公差 TOLERANCE	.X ± 0.25 .XX ± 0.13	單位 UNIT	mm	THIRD ANGLE PROJECTION	